



mm X111 Rugged Stand-Alone Linear Position Sensor

Intrinsically Safe For Hazardous Gas/Vapour Atmospheres

FEATURES


- Intrinsically safe for Gas to: Ex II 1G
- Non-contacting inductive technology to eliminate wear
- Travel set to customer's requirement
- High durability and reliability
- High accuracy and stability
- Sealing to IP65/IP67 as required

Our X111 LIPS® (Linear Inductive Position Sensor) incorporates electronics system EX07 which is ATEX / IECEx approved for use in potentially explosive gas / vapour atmospheres. This heavy-duty version of the X101 sensor with a stronger 12.6mm push rod, recommended for applications where vibration is an issue or there is a need for longer travel sensors, mounted horizontally, and supported between rod eyes.

It remains an affordable, durable, high accuracy position sensor designed for industrial and scientific feedback applications.

The unit is highly compact and space-efficient, being responsive along almost its entire length. Like all sensors, the X111 provides a linear output proportional to travel. Each sensor is supplied with the output calibrated to the travel required by the customer, any stroke from 0-5mm to 0-800mm and with full EMC protection built in.

The sensor is very robust, the body and push rod being made of stainless steel for long service life and environmental resistance. Overall performance, repeatability and stability are outstanding over a wide temperature range. The sensor is easy to install with mounting options including M8 rod eye bearings and body clamps. The push rod can be supplied free or captive, with female M8 thread, an M8 rod eye, or dome end, Captive push rods can be sprung loaded, in either direction, on sensors up to 300mm of travel. The X111 also offers a wide range of mechanical options, environmental sealing is to IP65 or IP67, depending on selected cable or connector options.



X111-17s

SPECIFICATION

Dimensions

Body diameter	35 mm
Body length (Axial version)	calibrated travel + 163 mm
Body length (Radial version)	calibrated travel + 186 mm
Push rod extension	calibrated travel + 7 mm, OD 12.6 mm
For full mechanical details see drawing X111 -11	

Power Supply

+5V dc nom. $\pm 0.5V$, 10mA typ 20mA max

Output Signal

0.5-4.5V dc ratiometric, Load: 5k Ω min.

Independent Linearity

$\leq \pm 0.25\%$ FSO @ 20°C - up to 450 mm
 $\leq \pm 0.5\%$ FSO @ 20°C - over 450 mm
 $\leq \pm 0.1\%$ FSO @ 20°C* available upon request.

*Sensors with calibrated travel from 10 mm up to 400 mm.

Temperature Coefficients

$< \pm 0.01\%$ /°C Gain &
 $< \pm 0.01\%$ FS/°C Offset

Frequency Response

> 10 kHz (-3dB)

Resolution

Infinite

Noise

$< 0.02\%$ FSO

Intrinsic Safety

Ex II 1G
 Ex ia II C T4 Ga (Ta= -40°C to 80°C)

Approval only applies to the specified ambient temperature range and atmospheric conditions in the range 0.80 to 1.10 Bar, oxygen $\leq 21\%$

Sensor Input Parameters

(connector option/s)	Ui: 11.4 V, Ii: 0.20A, Pi: 0.51 W.
(cable option/s)	Ci: 1.16 μ F, Li: 50 μ H Ci: 1.36 μ F, Li: 860 μ H with 1 km max. cable

Environmental Temperature Limits

Operating	-40°C to +80°C
Storage	-40°C to +125°C

Sealing

IP65/IP67 depending on connector / cable option

EMC Performance

EN 61000-6-2, EN 61000-6-3

Vibration

IEC 68-2-6: 10 g

Shock

IEC 68-2-29: 40 g

MTBF

350,000 hrs 40°C Gf

Drawing List

X111-11 Sensor Outline
 Drawings, in AutoCAD® dwg or dxf format, available on request.

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.



Intrinsically safe equipment is defined as "equipment which is incapable of releasing sufficient electrical or thermal energy under normal or abnormal conditions to cause ignition of a specific hazardous atmosphere mixture in its most easily ignited concentration."

ATEX / IECEx approved to;

Ex II 1G

Ex ia IIC T4 Ga (Ta = -40°C to +80°C)

Designates the sensor as belonging to; Group II: suitable for all areas except mining, Category 1 G: can be used in areas with continuous, long or frequent periods of exposure to hazardous gas (Zone 0).

Protection class ia, denotes intrinsically safe for all zones Apparatus group IIC: suitable for IIA to IIC explosive gas. Temperature class T4: maximum surface temperature under fault conditions 135°C. Ambient temperature range extended to -40°C to +80°C.

It is imperative intrinsically safe sensors be used in conjunction with a galvanic barrier to meet the requirements of the product certification. The X005 Galvanic Isolation Amplifier is purpose made for IS sensors making it the perfect choice. Refer to the X005 datasheet for product specification and output configuration options.

Safety Parameters:

Ui: 11.4V, Ii: 0.20A, Pi: 0.51W

Ci = 1.36µF* Li = 860µH* (cable option/s)

Ci = 1.16µF Li = 50µH (connector option/s)

*Figures for 1km cable where: Ci = 200pF/m & Li = 810nH/m

Sensors can be installed with a maximum of 1000m of cable.

Cable characteristics must not exceed:

Capacitance: ≤ 200 pF/m for max. total of: 200 nF.

Inductance: ≤ 810 nH/m for max. total of: 810 µH

For cable lengths exceeding 10 metres a five wire connection is recommended to eliminate errors introduced by cable resistance and associated temperature coefficients. ATEX / IECEx approved sensors suitable for dust (E series) and mining (M series) applications, are also available.

TABLE OF OPTIONS

CALIBRATED TRAVEL: Factory set to any length from 0-5mm to 0-800mm (e.g. 254mm)

ELECTRICAL INTERFACE OPTIONS

Axial sensors supplied with access to output 'zero' and 'span' calibration adjustments as standard. No access option available.

The Positek® X005 Galvanic Isolation Amplifier is available with the following output options;

Standard: 0.5 - 9.5V or 4 - 20mA.
Reverse: 9.5 - 0.5V or 20 - 4mA.

CONNECTOR/CABLE OPTIONS

Connector - Hirschmann GD series	Axial, IP65
Connector - Hirschmann ELWIK 410 2	Radial, IP67
Cable† with M12 gland or short gland	Axial, IP67
Cable† with PG9 gland	Radial, IP67


†Three core (black jacket) or five core (blue jacket) cable options available. Cable length >50 cm – please specify length in cm up to 15000 cm max.

We recommend all customers refer to the 3 or 5-Wire Mode Connection page.

MOUNTING OPTIONS


M8 rod eye bearing (radial versions), Body Tube Clamp/s (axial or radial versions).

PUSH ROD OPTIONS – standard retained with M8x1.25 female thread, M8 rod eye bearing, Dome end, Sprung loaded (retraction or extension) or Free.

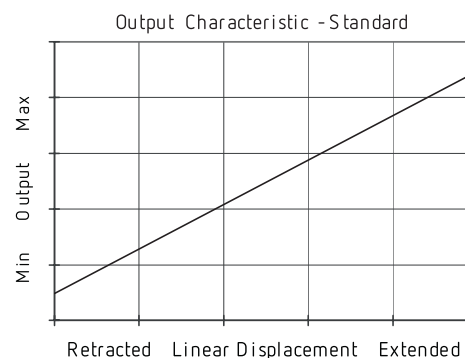

THREE OR FIVE-WIRE MODE CONNECTION FOR INTRINSICALLY SAFE SENSORS IN HAZARDOUS ATMOSPHERES

The aim of this document is to help readers who do not understand what is meant by three or five wire modes of connection between the galvanic isolation amplifier and sensor, and the factors behind them. It is by no means an in-depth technical analysis of the subject. Whether opting for a pre-wired Intrinsically Safe sensor or one with a connector, choosing the right mode of connection and cable to suit the application requires careful consideration. Interconnecting cables are not perfect conductors and offer resistance to current flow, the magnitude of resistance† depends on conductors resistivity, which changes with temperature, cross sectional area‡ and length. If the voltage were to be measured at both ends of a length of wire it would be found they are different, this is known as volts drop. Volts drop changes with current flow and can be calculated using Ohm's law, it should be noted that volts drop occurs in both positive and negative conductors. The effects of volts drop can be reduced by increasing the conductors cross sectional area, this does not however eliminate the effects due to temperature variation. There are instances where large cross-section cables are not practical; for example most standard industrial connectors of the type used for sensors have a maximum conductor capacity of 0.75mm², copper prices and ease of installation are other considerations. This is important because the effects of volts drop can significantly alter the perceived accuracy of the sensor which is ratiometric i.e. the output signal is directly affected by the voltage across the sensor. Changes in temperature will also be seen as gain variation in the sensor output. **Three wire mode** connections are common and are suitable in most cases with short or moderate cable runs. Applications that do not require a high degree of accuracy but have cable runs, say in excess of 10m, volts drop can be reduced by introducing a terminal box close to the sensor and using a larger cross-section cable for a majority of the cable run. Sensors supplied with three core cable are calibrated with the cable fitted which largely eliminates errors due to conductor resistance at room temperature however, as mentioned above, small gain errors due to temperature fluctuations should be expected. **Five wire mode** connections have significant benefits as losses in the positive and negative conductors are compensated for by the galvanic isolation amplifier which can 'sense' the voltage across the sensor and dynamically adjust the output voltage so that the voltage across the sensor is correct. The effects of cable resistance and associated temperature coefficients are eliminated allowing for smaller conductors than a three wire connection for the same cable run. The amplifier can compensate for up to 15 per conductor with a current flow of 15mA, which is more than adequate for 150m of 0.25 mm² cable, longer lengths will require larger conductors. **For this reason recommends five wire connections for cable lengths exceeding 10 metres in 0.25 mm² cable to preserve the full accuracy of the sensor.** See illustrations below for examples of connecting a sensor to the galvanic isolation amplifier.

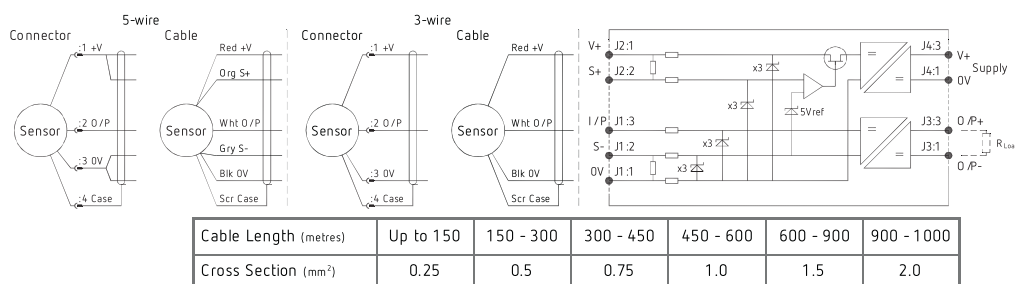

The table above shows recommended conductor sizes with respect to cable length for both three and five wire connections, based on copper conductors. Three wire connections will introduce a gain reduction of 5% and a $\pm 1\%$ temperature dependence of gain over the range -40°C to $+80^{\circ}\text{C}$ for the cable temperature. (i.e. about $-150 \text{ ppm}/^{\circ}\text{C}$ for the maximum lengths shown and less pro rata for shorter lengths.) It should be noted that the maximum cable length, as specified in the sensor certification, takes precedence and must not be exceeded.

The sensors are supplied with three core 0.25 mm² cable as standard, however five core 0.25 mm² cable can be supplied on request. The galvanic isolation amplifier is available as;

G005-* for 'G' and 'H' prefix sensors / X005-*** for 'E', 'M' and 'X' prefix sensors**

† $R = L/A$ is the resistivity of the conductor (Ωm) L is the length of conductor (m) A is the conductor cross-sectional area (m²).

‡ It is presumed that direct current flow is uniform across the cross-section of the wire, the galvanic isolation amplifier and sensor are a dc system.



INTRINSICALLY SAFE - GAS/VAPOUR ATMOSPHERES

	a	b	c	d	e	f	g	h	j
X111	Displacement	A	Adjustments	Connections	Option	Option	Option	Option	Z-code

a Displacement (mm)		Value
Displacement in mm	e.g. 0 - 254 mm	254
b Output		
Supply V dc V _s (tolerance)	Output	Code
+5V (4.5 - 5.5V)	0.5 - 4.5V (ratiometric with supply)	A
c Calibration Adjustments		Code
Accessible - default†	†Axial body style only. Radial body style sealed by default.	blank
Sealed		Y
d Connections Cable* or Connector		Code
Cable Gland - Radial	IP67 Pg9 - 3-core cable	Ixx
Cable Gland - Radial	IP67 Pg9 - 5-core cable	IQxx
Connector - Axial	IP65 DIN 43650 'C'	J
Connector - Radial	IP67 M12 IEC 60947-5-2	K
Cable Gland - Axial	IP67 M12 - 3-core cable	Lxx
Cable Gland - Axial	IP67 M12 - 5-core cable	LQxx
Cable Gland - Axial	IP67 Short - 3-core cable	Mxx
Cable Gland - Axial	IP67 Short - 5-core cable	MQxx
*Supplied with 50 cm as standard, specify required cable length specified in cm. e.g. L2000 specifies cable gland with 20 metres of cable. Nb: restricted cable pull strength.		
e Body Fittings		Code
None - default		blank
M8 Rod-eye Bearing	Radial body style only	N
Body Clamps - 1 pair		P
Body Clamps - 2 pairs		P2
f Sprung Push Rod		Code
None - default		blank
Spring Extend	Up to 300mm displacement.	R
Spring Retract	Captive push rod only.	S
g Push Rod Fittings		Code
None - default	Female Thread M8x1.25x12 deep	blank
Dome end	Required for option 'R'	T
M8 Rod-eye Bearing		U
h Push Rod Options		Code
Captive - default	Push rod is retained	blank
Non-captive	Push rod can depart body	V

j Z-code
Calibration to suit X005 - Default
Connector IP67 M12 IEC 60947-5-2 must have
Connector IP67 M12 IEC 60947-5-2 must have
≤± 0.1% @20°C Independent Linearity disp 10mm & 400mm only!
Connector with cable option 'J', 'JQ', 'K' or 'KQ' with

Note! All Intrinsically Safe (IS) sensors must have a Z-code suffix.

IS sensors must be used in conjunction with a Galvanic Isolation Amplifier - See X005 for Output options.

INSTALLATION INFORMATION

For certificate number and safety parameters information for product marked EX04, see next page.



ATEX /IECEX Qualified to Intrinsic Safety Standard Certificate numbers SIRA 13 ATEX2371X IECEX SIR 13.0154X		Ex II 1G Ex ia IIC T4 Ga (Ta = -40°C to + 80°C)	
Electronics Version	Output Description:	Supply Voltage: V_s (tolerance)	Load resistance:
EX07	0.5 - 4.5V (ratiometric with supply) [Output code 'A']	+ 5V (4.5 - 5.5V)	5k Ω min

Connector Pin Layout:

DIN 43650 C



IEC 60947-5-2

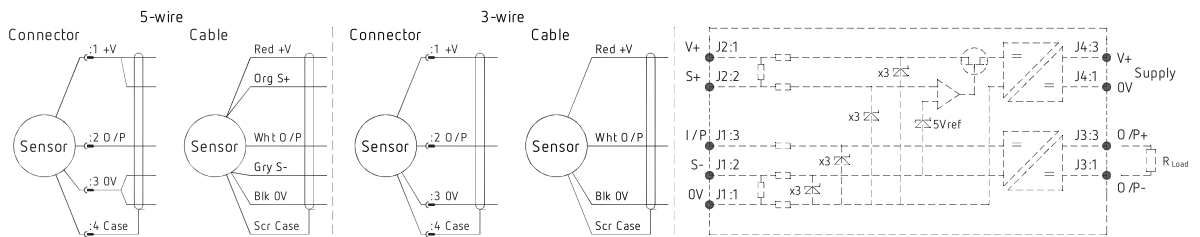

Putting Into Service: The sensor must be used with a galvanic isolation barrier designed to supply the sensor with a nominal 5V and to transmit the sensor output to a safe area.

The barrier parameters must not exceed:

$U_i = 11.4V$ $I_i = 0.20A$ $P_i = 0.51W$
 $C_i = 1.36\mu F^*$ $L_i = 860\mu H^*$ ('Lxx', 'LQxx', 'Mxx' or 'MQxx' options) *Figures for 1km cable
 $C_i = 1.16\mu F$ $L_i = 50\mu H$ ('J' option)

The sensor is certified to be used with up to **1000m** of cable, cable characteristics must not exceed:

Capacitance: ≤ 200 pF/m for max. total of: 200 nF / **Inductance:** ≤ 810 nH/m for max. total of: 810 μH

Approval only applies to specified ambient temperature range and atmospheric conditions in the range: 0.80 to 1.10 Bar, oxygen 21%. The performance of the sensor may be affected by voltage drops associated with long cable lengths; For cable lengths exceeding 10 metres a five wire connection is recommended to eliminate errors introduced by cable resistance and associated temperature coefficients.

N.b. sensors supplied with cable, the free end must be appropriately terminated.

Special Condition for Safe Use:

The apparatus does not meet the 500 V r.m.s dielectric strength test between circuit and frame, in accordance with clause 6.3.13 of IEC 60079- 11:2011. This must be taken into consideration on installation.

When using a Sensor that has an integral cable in a dust application, the free end of the cable shall be appropriately terminated for the zone of use.

Under certain extreme circumstances, the non-metallic and isolated metal parts incorporated in the enclosure of this equipment may generate an ignition-capable level of electrostatic charge. Therefore the equipment shall not be installed in a location where the external conditions are conducive to the build-up of electrostatic charge on such surfaces. This is particularly important if the equipment is installed in a zone 0 location. In addition, the equipment shall only be cleaned with a damp cloth.



■ INSTALLATION INFORMATION

Warning - The M12 IEC 60947 connector may be rotated for purposes of convenient orientation of the connector and cable, however rotating the connector more than one complete revolution is not recommended. **Repeated rotation of the connector will damage the internal wiring!**

Use: The sensor is designed to measure linear displacement and provide an analogue output signal.

Assembly and Dismantling: The unit is not to be serviced or dismantled and re-assembled by the user.



Maintenance: No maintenance is required. Any cleaning must be done with a damp cloth.

Gain and Offset Adjustment: (Where accessible - Typically $\pm 10\%$ Min available) To adjust the gain or offset use a small potentiometer adjuster or screwdriver 2mm across. Do not apply too much force on the potentiometers.

Mechanical Mounting: Depending on options; Body can be mounted by M8 rod eye or by clamping the sensor body - body clamps are available, if not already ordered. Target by M8x1.25 female thread or M8 rod eye. It is assumed that the sensor and target mounting points share a common earth.

Output Characteristic: Target is extended 7 mm from end of body at start of normal travel. The output increases as the target extends from the sensor body, the calibrated stroke is between 5 mm and 800 mm.

Incorrect Connection Protection levels: Not protected – the sensor is not protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.

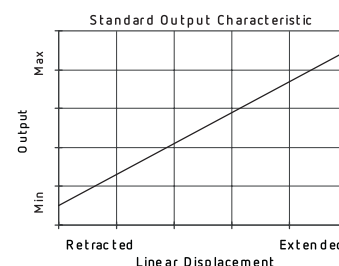

For certificate number and safety parameters information for product marked EX07, see previous page.

ATEX Qualified to Intrinsic Safety Standard Certificate numbers SIRA 00ATEX2076X			Ex II 1G EEx ia IIC T4 (Ta = -40°C to +80°C)
Electronics Version	Output Description:	Supply Voltage: V_s (tolerance)	Load resistance:
EX04	0.5 - 4.5V (ratiometric with supply) [Output code 'A']	+5V (4.5 - 5.5V)	5k Ω min

The barrier parameters must not exceed:





$U_i = 11.4V$ $I_i = 0.20A$ $P_i = 0.51W$
 $C_i = 1.36\mu F^*$ $L_i = 710\mu H^*$ ('Lxx or 'Mxx' options) *Figures for 1km cable
 $C_i = 1.16\mu F$ $L_i = 50\mu H$ ('J' option)

The sensor is certified to be used with up to **1000m** of cable, cable characteristics must not exceed:

Capacitance: ≤ 200 pF/m for max. total of: 200 nF / **Inductance:** ≤ 660 nH/m for max. total of: 660 μH

With the exception of the certificate number and safety parameters above, all other notes regarding Putting Into Service, Use, Assembly and Dismantling etc. on previous page apply to sensors marked EX04 or EX07.

N.b. ROD-EYE ORIENTATION NOT GUARANTEED.

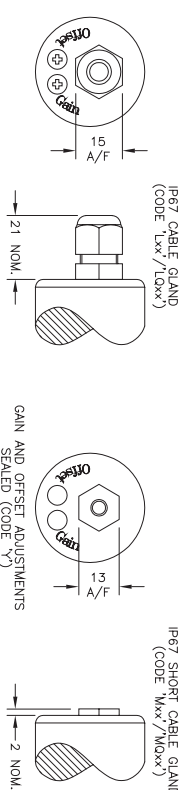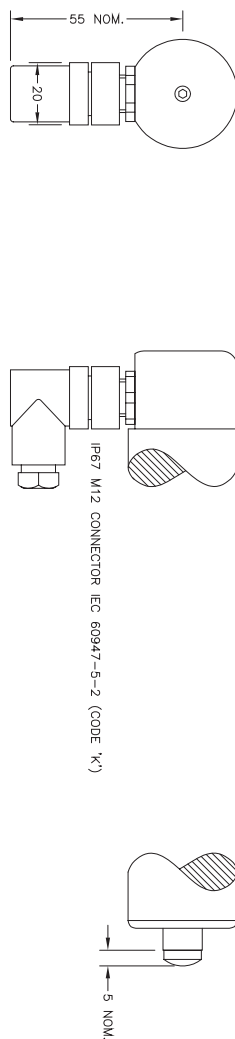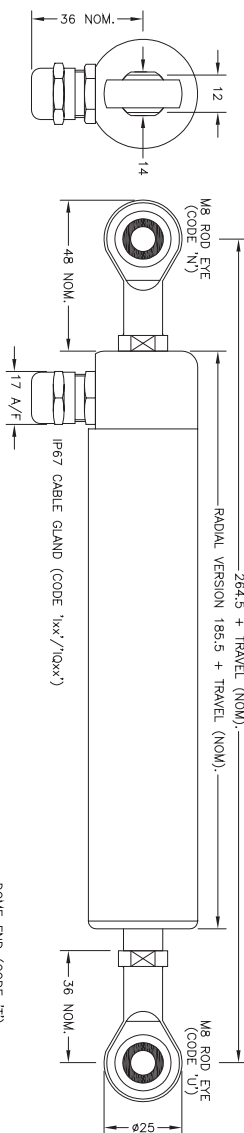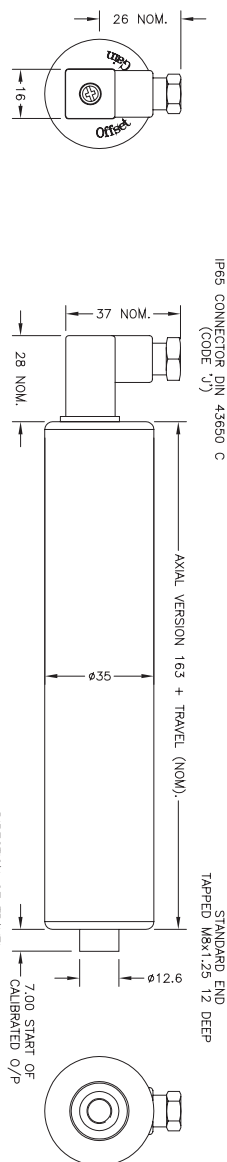

M	APP ROVAL STANDARD 5 UPDATED - RAN765.	PDM
OP	SP RUNG OPTION 3.00 WAS 250 - RAN 473.	PDM
N	OPTIONS 'R' & 'S' OVER R TRAVEL DIMS MODIFIED - RAN1030.	PDM
O	RANGE WAS 50 -600mm RAN1056	RDS
P	5-CORE OPTION ADDED ~ RAN1102	PDM
Q	RANGE NOTE AMENDED ~ RAN1200	PDM



CE

THE PUSH-ROD REPLACES A FURTHER 4mm NOM. FROM START OF CALIBRATED TRAVEL. STANDARD VERSIONS THE PUSH-ROD EXTENDS A FURTHER 8mm NOM. FROM END OF CALIBRATED TRAVEL. FOR SPRUNG VERSIONS: R: 1mm, S: 2mm, V CODED PUSH-ROD WILL DEPART SENSOR BODY.

PRINTING NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.
CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED
BY THE AUTHORIZED PERSON

THIS IS AN UNCONTROLLED DRAWING AND WILL NOT BE UPDATED

ELECTRICAL OPTIONS / SPECIFICATIONS

OUTPUT 0.5 TO 4.5V RATONETRIC 5V
SUPPLY CURRENT 12mA TYP. 20mA MAX.

CABLE: 0.2mm² 0/4 SCREEN, PUR JACKET – SUPPLIED
WITH 50cm OR REQUIRED LENGTH IN CM (15000cm MAX).
STANDARD 5-CORE: JACKET 4.6mm BLUE e.g. 150”
OPTIONAL 5-CORE: JACKET 4.6mm BLUE e.g. 1050”

CABLE/CONNECTOR* CONNECTIONS:

BLACK	RED	1:1	+1ve
BLACK	ORNG	1:1	+5ENSE (5-WIRE ONLY)
WHITE	BLACK	1:3	0
WHITE	WHITE	1:2	0 SENSE (5-WIRE ONLY)
SCREEN	SCREEN	1:4	0 BODY


*CONNECTORS: MAXIMUM CONDUCTOR CROSS SECTION 0.75mm²

RANGE OF DISPLACEMENT FROM 0–5mm TO 0–800mm e.g. 76mm
IN INCREMENTS OF 1mm.


BODY MATERIAL: STAINLESS STEEL.

FURTHER OPTIONS:

- SINGLE PAIR OF BODY CLAMPS 1P
- TWO PAIRS OF BODY CLAMPS 1P2
- SPRING RETURN PUSH-ROD, TRAVEL £300mm
- RETURN TO EXTENDED POSITION (CODE R)
- RETURN TO RETRACTED POSITION (CODE S)
- PUSH-ROD FREE (CODE V) – NOT AVAILABLE WITH SPRING OPTIONS.
- GAIN AND OFFSET ADJUSTMENTS NOT AVAILABLE WITH RODD BODY, CODE 1xx AND K₁ OPTIONS.





NOTE: -- READ INSTALLATION SHEET X111-19 FOR FULL INSTRUCTIONS FOR USE.

ATEX /IECEx APPROVED TO  II G Ex II ICT 4 Ga (-40 to +80 °C) U11.1/IV, II 0.2A, II 0.5/IV

APPROVED FOR USE IN CONJUNCTION WITH A CHEMICALLY ISOLATED BARRIER.

NOTE: APPROVAL ONLY APPLIES AT NORMAL ATMOSPHERIC PRESSURE!

M	08.04/14		CHECKED BY X.X.	+0.4/-0.4
N	28.07/15		RDS	X.X ±0.0
O	9/11/15		DIMS mm	X.XX ±0.0
P	07.04/17			
Q	29.08/17			
SCALE 12.5mm 				
DRAWING NUMBER X1111-11		REV Q		
		SHEET 1 OF 1		