

9



## ARF-A

Low capacity Acceleration Transducer 10~500m/s<sup>2</sup>

- General purpose
- Low capacity

The ARF-A acceleration transducer is used to measure the acceleration of structures subject to vibration such as machinery, vehicles, ships, civil engineering structures, buildings, and so forth. It is small and lightweight and can make measurement on the DC level.

Protection ratings: IP61 equivalent

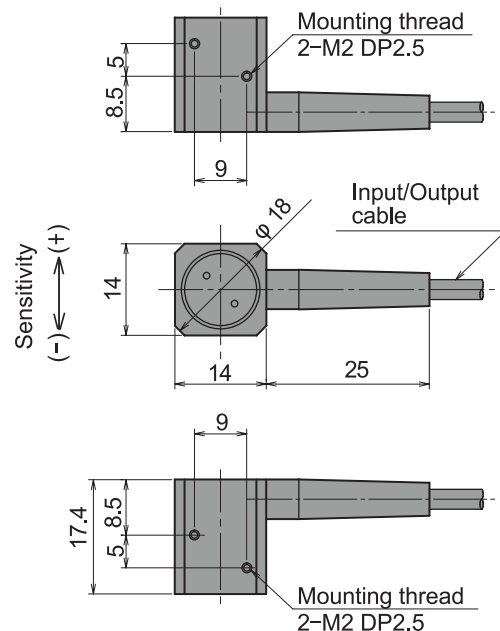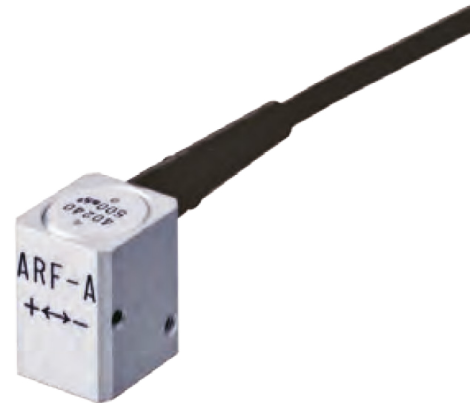

## SPECIFICATIONS

TYPE	ARF-10A	ARF-20A	ARF-50A	ARF-100A	ARF-200A	ARF-500A
Capacity	10m/s <sup>2</sup>	20m/s <sup>2</sup>	50m/s <sup>2</sup>	100m/s <sup>2</sup>	200m/s <sup>2</sup>	500m/s <sup>2</sup>
Rated Output	0.5mV/V(1000×10 <sup>-6</sup> strain)					
Non-linearity	1%RO					
Frequency response range ( ※ )	DC~50Hz	DC~80Hz	DC~130Hz	DC~180Hz	DC~310Hz	DC~520Hz
Natural frequency	100Hz	150Hz	240Hz	300Hz	520Hz	870Hz
Allowable temperature range	-10 ~ +50°C					
Over load	300%					
Input/Output resistance	120Ω					
Recommended exciting voltage	2V or less					
Allowable exciting voltage	5V					
Weight	13g					

※Sensitivity deviation ±5%

Input/Output cable :φ 3.2mm 0.08mm<sup>2</sup> 4-core shielded vinyl cable 5m Shield of Input/Output cable is grounded to the body.