Model 793L
Low frequency accelerometer

Features
- High sensitivity
- Ultra low-noise electronics for clear signals at very low vibration levels
- Low pass filtered to attenuate high frequencies
- Hermetic seal
- ESD protection
- Reverse wiring protection

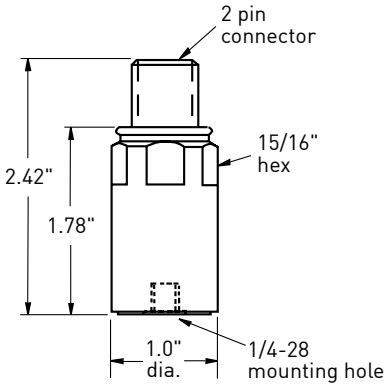

Dynamic

Sensitivity, ±5%, 25°C		500 mV/g
Acceleration range		10 g peak
Amplitude nonlinearity		1%
Frequency response:		
–5%		0.6 - 700 Hz
–10%		0.4 - 1,000 Hz
–3 dB		0.2 - 2,300 Hz
Resonance frequency		15 kHz
Transverse sensitivity, max.		5% of axial
Temperature response		–50°C –10%
		+120°C +10%

Electrical

Power requirements:	voltage source	18 - 30 VDC
	current regulating diode	2 - 10 mA
Electrical noise, equiv. g:		
Broadband	2.5 Hz to 25 kHz	8.0 µg
Spectral	2 Hz	2.0 µg/√Hz
	10 Hz	0.4 µg/√Hz
	100 Hz	0.2 µg/√Hz
Output impedance, max		100Ω
Bias output voltage		10 VDC
Grounding		case isolated, internally shielded

Environmental

Temperature range	–50 to 120°C
Vibration limit	250 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv. g.	20 µg/gauss
Sealing	hermetic
Base strain sensitivity	0.0001 g/µstrain

Physical

Sensing element design	PZT ceramic / compression
Weight	142 grams
Case material	316L stainless steel
Mounting	¼-28 tapped hole
Output connector	2 pin, MIL-C-5015 style
Mating connector	R6 type
Recommended cabling	J9T2A

Connector pin	Function
Shell	ground
A	power/ signal
B	common

Accessories supplied: SF6 mounting stud (International customers specify mounting requirements); calibration data (level 3)
Options: Temperature sensor intrinsic safety certification

FM APPROVED

98191 Rev.G.2 6/99

ALTHEN reserves the right to vary the foregoing details without prior notice

ALTHEN Meß- und Sensortechnik

ALTHEN GmbH Mess- und Sensortechnik
Frankfurter Strasse 150 - 152
65779 Kelkheim / Germany
phone: +49 (0)6195 70060
fax: +49 (0)6195 700666
sales@althensensors.com
www.althensensors.com