



mm S114

Description

- Non-contacting inductive technology
- to eliminate wear
- Travel set to customer's requirement
- Compact and self-contained
- High durability and reliability
- High accuracy and stability
- Sealing to IP68 10Bar
- High durability and reliability



As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, has the expertise to supply a sensor to suit a wide variety of applications. Our S114 LIPS® (Linear Inductive Position Sensor) is an affordable, durable, high-accuracy position sensor. The S114 is an affordable, durable, high-accuracy position sensor derived from the P101. Designed for applications where the sensor would be completely submerged during normal operation, it retains desirable features such as compact size, good sensor performance yet capable of working in pressures up to 10Bar.

The S114, like all our sensors, provides a linear output proportional to displacement. Each unit is supplied with the output calibrated to the travel required by the customer, from 5 to 800mm and with full EMC protection built in. The sensor is very robust, the body and push rod being made of stainless steel for long service life and environmental resistance.

Overall performance, repeatability and stability are outstanding over a wide temperature range. The sensor is easy to install with mounting options including M5 stainless steel rod eye bearings and body clamps. The push rod can be supplied free or captive, with female M5 thread, an M5 rod eye or dome end, captive push rods can be spring extended on sensors with up to 300mm of travel. The S114 also offers a wide range of mechanical and electrical options, environmental sealing is to IP68 10Bar.

Specifications

DIMENSIONS	
Body diameter	35 mm
Body length (Axial version)	measurement length + 166 mm
Body length (Radial version)	measurement length + 189 mm
Push rod extension	measurement length + 9mm, OD 9.45mm
<i>For full mechanical details see drawing S114-11</i>	
Independent linearity	< ± 0.25% up to 450mm @ 20°C < ± 0.5% over 450mm @ 20°C
Temperature coefficients	< ± 0.01%/°C Gain & < ± 0.01%FS/°C Offset
Frequency response	> 10 kHz (-3dB) > 300 Hz (-3dB) 2 wire 4 to 20 mA
Resolution	Infinite
Noise	< 0.02% FSO
Environmental Temperature Limits (Non Icing)	
Operating	-40 to +125°C standard -20 to +85°C buffered
Storage	-40 to +125°C
Sealing	IP68 10Bar
EMC Performance	EN 61000-6-2, EN 61000-6-3
Vibration	IEC 68-2-6: 10g
Shock	IEC 68-2-29: 40 g
MTBF	350,000 hrs 40°C Gf
Drawing List	
S114-11	Sensor Outline



Drawings, in AutoCAD® dwg or dxf format, available on request.

How PIPS® technology eliminates wear for longer life

PIPS® technology (Inductive Position Sensor) is a major advance in displacement sensor design. PIPS®-based displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT.

PIPS® technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A PIPS® sensor, based on simple inductive coils using ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life.

PIPS® overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials. It requires no separate signal conditioning.

Our LIPS® range are linear sensors, while RIPS® are rotary units and TIPS® are for detecting tilt position. Ask us for a full technical explanation of PIPS® technology. We also offer a range of ATEX-qualified intrinsically- safe sensors.

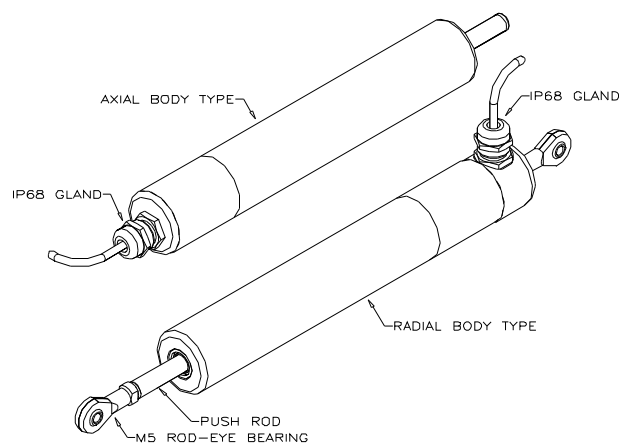


Table of options

MEASUREMENT RANGE:	Factory-set to any length from 5 to 800mm in increments of 1mm.
--------------------	---

ELECTRICAL INTERFACE OPTIONS

OUTPUT SIGNAL	SUPPLY INPUT	OUTPUT LOAD
Standard:		
0.5-4.5V dc ratiometric	+5V dc nom. ± 0.5V.	5kΩ min.
Buffered:		
0.5-4.5V dc	+24V dc nom. + 9-28V.	5kΩ min.
±5V dc	±15V dc nom. ± 9-28V.	5kΩ min.
0.5-9.5V dc	+24V dc nom. + 13-28V.	5kΩ min.
±10V dc	±15 V dc nom. ± 13.5-28V.	5kΩ min.
Supply Current	10mA typical, 20mA maximum.	
4-20mA (2 wire)	+24 V dc nom. + 18-28V.	300Ω @ 24V.
(3 wire sink)	+24 V dc nom. + 13-28V.	950Ω @ 24V.
(3 wire source)	+24 V dc nom. + 13-28V.	300Ω max.

CONNECTOR OPTIONS

Cable with PG7 gland	Axial, IP68 10Bar
Cable with PG7 gland	Radial, IP68 10Bar
Cable length >50cm – please specify length in cm	

MOUNTING OPTIONS

M5 rod eye bearing (radial versions), Body Tube Clamp/s (axial or radial versions).
PUSH ROD OPTIONS – standard retained with M5x0.8 female thread, M5 rod eye bearing, Dome end, Spring extended or Free.

