



m/s² 797T-1
Dual output sensor

SPECIFICATIONS


Sensitivity, ±5%, 25°C		100 mV/g
Acceleration range		80 g peak
Amplitude nonlinearity		1%
Frequency response:	±5%	3 - 5,000 Hz
	±10%	2 - 7,000 Hz
	±3 dB	1 - 12,000 Hz
Resonance frequency		26 kHz
Transverse sensitivity, max		5% of axial
Temperature response:	-50°C	-5%
	+120°C	+5%
Temperature output sensitivity, ±5%		10 mV/°K
Temperature measurement range		223° to 393°K (-50° to +120°C)
Power requirement:	Accelerometer	Temp sensor
Voltage source	18 - 30 VDC	18 - 30 VDC
Current regulating diode	2 - 10 mA	2 - 4 mA
Electrical noise, equiv. g:		
Broadband	2.5 Hz to 25 kHz	600 µg
Spectral	10 Hz	8 µg/√Hz
	100 Hz	5 µg/√Hz
	1,000 Hz	5 µg/√Hz
Output impedance, max		100 Ω
Bias output voltage		12 VDC
Grounding		case isolated, internally shielded
Temperature range		-50° to +120°C
Vibration limit		500 g peak
Shock limit		5,000 g peak
Electromagnetic sensitivity, equiv. g		30 µg/gauss
Sealing		hermetic
Base strain sensitivity		0.002 g/µstrain
Sensing element design		PZT, shear
Weight		135 grams
Case material		316L stainless steel
Mounting		1/4-28 captive socket head screw
Output connector		3 pin, MIL-C-5015 style
Mating connector		R6G type
Recommended cabling		J9T3A

Accessories supplied: SF6 mounting stud; calibration data (level 2)



Key features

- General purpose accelerometer with internal temperature sensor
- Manufactured in ISO 9001 facility

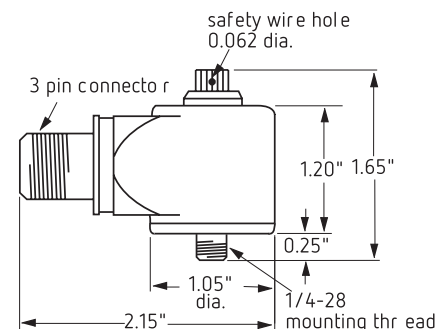

Connections	
Function	Connector pin
accel, power/signal	A
accel/temp common	B
temp sensor, power/signal	C
ground	shell



Note: Due to continuous process improvement, specifications are subject to change without notice. This document is cleared for public release.

Version | 11/2019

The information provided herein is to the best of our knowledge true and accurate, it is provided for guidance only. All specifications are subject to change without prior notification.

Althen – Your expert partner in Sensors & Controls | althensensors.com

Althen stands for pioneering measurement and custom sensor solutions. In addition we offer services such as calibration, design & engineering, training and renting of measurement equipment.

Germany/Austria/Switzerland
info@althen.de

Benelux
sales@althen.nl

France
info@althensensors.fr

Sweden
info@althensensors.se

USA/Canada
info@althensensors.com

Other countries
info@althensensors.com