



**750-100/200 Series Tiltmeter**  
RS485 Digital Output



The Jewell D750-100 (Single Axis) and D750-200 (Dual Axis) Black Diamond Tiltmeter series are fluid damped inclinometers with RS485 digital output




The Jewell D750-100/200 Series is the digital version of the Black Diamond tilt sensor line for geotechnical measurement. It features a 0.001° resolution with RS485 digital output signal

**FEATURES & BENEFITS**


- Digital output
- Resolution 0.001°
- Mechanical Shock 1500g 1msec 1/2 sine
- Industry Standard EIA RS485
- For use in high shock and vibration environments
- High Precision and Performance
- Low Noise

**OUTLINE DIAGRAM: D750-100/200 SERIES DIGITAL TILTMETER**

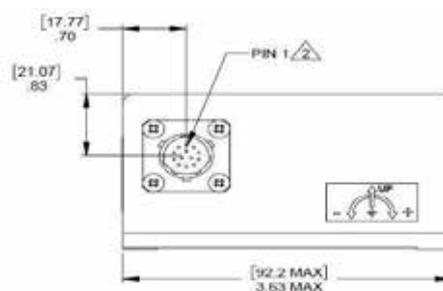


**APPLICATIONS**

- Radar/Antenna Control
- Structural Monitoring
- Seismic Monitoring
- Platform Leveling
- Lab Testing & Research

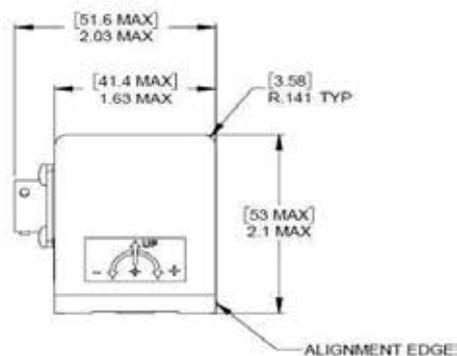

**PIN OUT**

CONN. PIN	FUNCTION
1	FACTORY USE
2	FACTORY USE
3	CASE GROUND
4	+SERIAL PORT
5	-SERIAL PORT
6	FACTORY USE
7	FACTORY USE
8	FACTORY USE
9	FACTORY USE
10	FACTORY USE
11	PWR RTN
12	+PWR
13	FACTORY USE

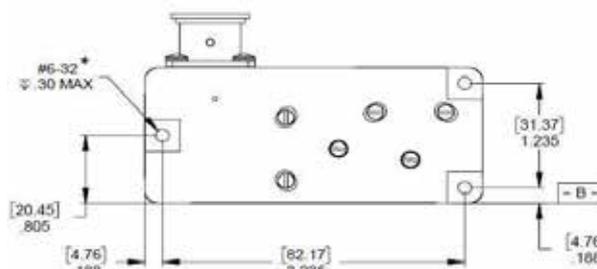

\*Also available in M6 metric through holes



**PERFORMANCE**

Input Range <sup>1</sup> , °	±1.0	±3.0	±14.5	±30.0	±60.0
Number of Axis	1,2	1,2	1,2	1,2	1,2
Non Linearity <sup>2</sup> , %FRO, Max	0.02	0.015	0.02	0.02	0.03
Scale Factor Tolerance, % Max	0.05	0.05	0.05	0.05	0.05
Scale Factor Temperature Sensitivity, % reading/°C, Max	0.01	0.01	0.01	0.01	0.01
Output at 0° Tilt, °Max	0.01	0.01	0.05	0.05	0.05
0° Output Temperature Sensitivity, °/°C, Max	0.001	0.001	0.005	0.005	0.005
Bandwidth (-3dB), Hz, Nom <sup>3</sup>	3	6	30	30	30
Transverse Axis Misalignment, °, Max	0.15	0.15	0.5	0.5	0.5
Hysteresis, °, Max	0.001	0.001	0.001	0.001	0.001
Resolution and Threshold, °, Max	0.001	0.001	0.001	0.001	0.001
Power On Repeatability, °Max	0.001	0.001	0.001	0.001	0.001
Repeatability, °Max	0.001	0.001	0.002	0.002	0.003

**Digital Output**

Interface	EIA-RS485
Protocol	Proprietary (Custom)
Output Representation	Degrees
Baud Rate <sup>4</sup>	19200, 38400, 57600, 115200, 230400

**Electrical**

Supply Voltage, Volts DC	10 to 30
Input Current, mA, Max	Transmitting D750-100 (32 mA) & D750-200 (50 mA) Not transmitting D750-100 22 (mA) & D750-200 (40 mA)

**Environmental**

Operational Temp Range, °C	-40 to +85
Storage and Temp Range, °C	-40 to +85
Protection Class per IEC 529	IP67
NEMA Enclosure Rating	6
Seal	MILD-STD-202 Method 112
Shock Survival	1500g, 1msec, ½ sine
Vibration Survival, grms (20Hz to 2 KHz)	20


**Enclosure**

Housing Material	Anodized and Alodine Aluminum
Weight	DXI-100 8oz [226.80 g]/ DXI-200 10oz [283.50 g]
Connector Type	MS27476Y10D35P
Recommended Mating Connector	MS27473T10B35S

- NOTES:
- 1- Full range is defined as "from negative full input angle to positive full input angle"
  - 2 - Non-linearity is specified as deviation of output referenced to a best fit straight line, independent of misalignment.
  - 3 - In default condition without averaging enabled.
  - 4- Default Baud Rate is 38400




**TILT CONFIGURATION**

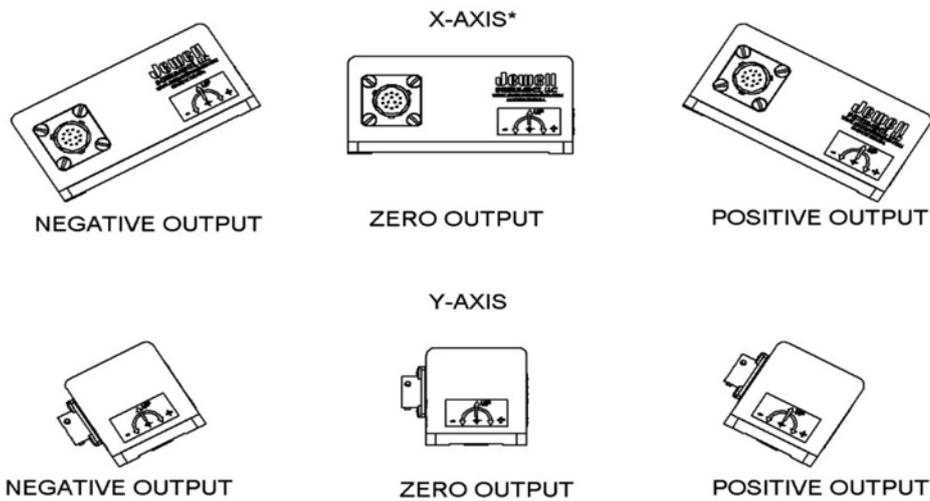

\*SENSITIVE AXIS THIS DIRECTION ONLY

**HOW TO ORDER**

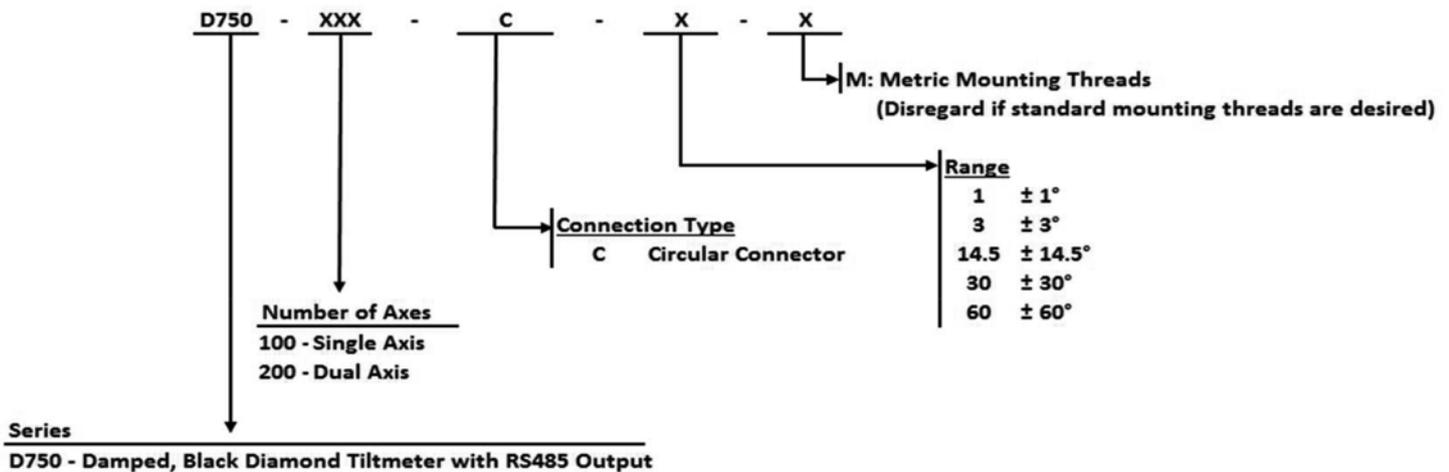

**Example:**  
D750-100-C-1-M  
RS485 output, damped, circular connector, ±1.0° range, metric mounting threads

**ACCESSORIES**

**Mating Connector**

Description	Part Number
Standard 13-pin connector	847774-002

**Cable Assemblies\***

Description	Part Number
6 Ft Cable	879605-003
10 Ft Cable	879605-004
2 M Cable	879605-009
3 M Cable	879605-010

\*All cable assemblies come with mating connector