
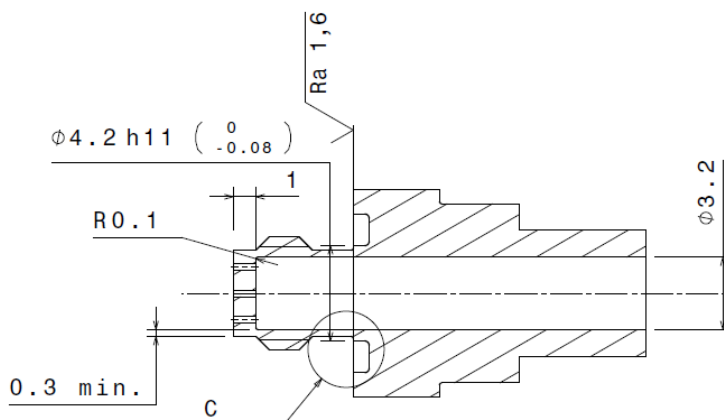
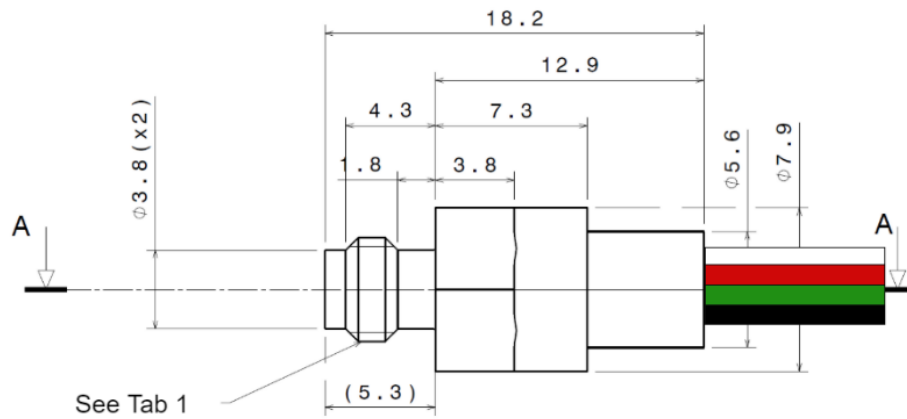



bar

INSTALLING SHEET: FOR MMP & MHP SENSOR

SENSEORADE
Miniaturized aerodynamic flow measurement

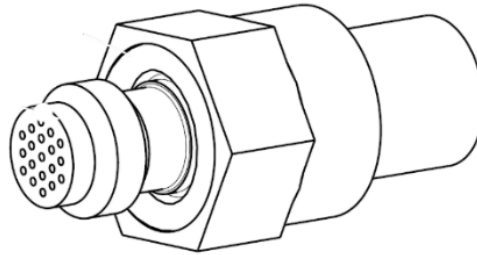

O-RING $\phi 5mm$

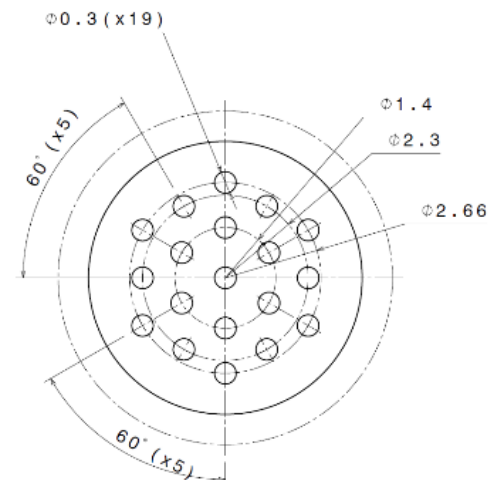

Unit in mm



■ ADDITIONAL TECHNICAL INFORMATION

O-RING:

- diameter / tore: 5mm / 1mm
- Material: Viton (FKM: fluorinated elastomer)
- Temperature range: -20 to 200°C
- Reference: R 2566

MAXIMUM APPLICABLE TORQUE:

- 1.6 Nm (14 Lb/In)

CORROSIVE FLUIDS:

- Can be used with brake fluid Dot 5.1 for other fluid please contact Althen (sales@Sensorade)

LEAKAGE:

- TAU-3219.04
- Length: 1m

ASSIGNMENT WIRE:

- Red wire: V+
- Black wire: V-
- White wire: S-
- Green wire: S+