



bar MPM285

FEATURES

- Cost Effective, Small size
- Chip from international famous brand; Laser Trimming for temperature compensation
- Pressure range: 0bar~1bar...35bar
- Gauge, Sealed gauge and Absolute
- Constant current or Constant voltage power supply
- Isolated construction, Enable to measure various media
- $\Phi 15\text{mm}$ standard OEM pressure sensor
- Full stainless steel 316L

APPLICATION


- Industrial process control
- Level measurement
- Gas, Liquid pressure measure
- Pressure checking meter
- Pressure calibrator
- Liquid pressure system and switch
- Cooling equipment and Air conditioner
- Aviation and Navigation inspection

ELECTRICAL PERFORMANCE

Power supply	$\leq 2.0\text{mA DC}$
Electrical connection	$\phi 0.5\text{mm}$ Kovar pin or 100mm silicon rubber flexible wires
Common mode voltage output	50% of input (typ.)
Input impedance	$2.5\text{k}\Omega \sim 5\text{k}\Omega$
Output impedance	$3.5\text{k}\Omega \sim 6\text{k}\Omega$
Response (10%~90%)	$< 1\text{ms}$
Insulation resistor	$100\text{M}\Omega @ 100\text{V DC}$
Overpressure	2 times FS

ENVIRONMENTAL CONDITIONS

Shock	No change at 10g RMS , (20~2000)Hz
Impact	100g, 11ms
Media compatibility	Liquid or gas that is compatible with construction material and FKM



MICROSENSOR
AUTHORIZED DISTRIBUTOR

MPM285 pressure sensor is an cost effective piezoresistive pressure sensor with small size. It has same outline, mounting dimensions and sealing methods as our other similar products, so it is highly interchangeable. It is widely used for pressure measurement of media which is compatible with stainless steel and FKM, especially the working site with limit installation space.

CONSTRUCTION PERFORMANCE

Diaphragm	Stainless steel 316L
Housing	Stainless steel 316L
Pin	Kovar
O-ring	FKM
Net weight	$\sim 10\text{g}$


BASIC CONDITIONS

Media temperature	$(35 \pm 1)^{\circ}\text{C}$
Environment temperature	$(35 \pm 1)^{\circ}\text{C}$
Shock	0.1g (1m/s^2) Max.
Humidity	$(50 \pm 10)\%\text{RH}$
Local air pressure	$(0.86 \sim 1.06)\text{bar}$
Power supply	$(1.5 \pm 0.0015)\text{mA DC}$

SPECIFICATION


Item*	Min.	Typ.	Max.	Units
Linearity		±0.15	±0.25	%FS,BFSL
Repeatability		±0.05	±0.075	%FS
Hysteresis		±0.05	±0.075	%FS
Zero output**			±2.0	mV DC
Output/Span***	50			mV DC
Zero thermal error		±0.75	±1.0	%FS, @35°C
Span thermal error		±0.75	±1.0	%FS, @35°C
Compensated temp. range	0 ~ 70			°C
Working temp. range	-40 ~ 125			°C
Storage temp. range	-40 ~ 125			°C
Stability error		±0.2		%FS/Year
* testing at basic condition ** Zero output for closed loop sensor *** Output/Span=full scale output - zero point				

OUTLINE CONSTRUCTION (UNIT:mm)

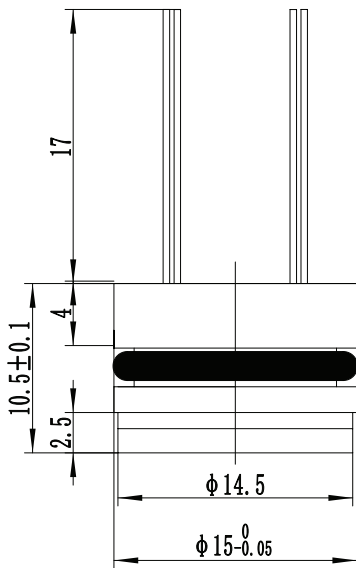

The suggested installation dimension is $\Phi 15^{+0.05}_{+0.02}$ mm

ELECTRICAL CONNECTION

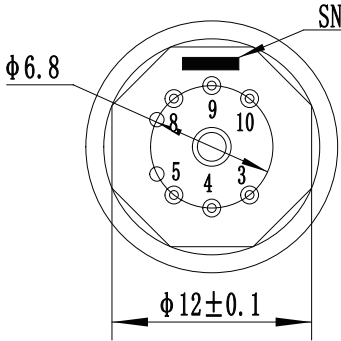

Pin	Definition
4	-OUT
5	-IN
8	+IN
9	+OUT

The actual electrical connection method, please check the parameter label enclosed with products.

ORDER GUIDE

MPM285		Pressure Sensor									
		Range code		Pressure range		Ref.	Range code	Pressure range		Ref.	
		03		0bar~1bar		G.A	10	0bar~10bar		G.A	
		07		0bar~2bar		G.A	12	0bar~20bar		G.A	
		08		0bar~3.5bar		G.A	13	0bar~35bar		G.S.A	
		09		0bar~7bar		G.A					
		Code		Pressure type							
		G		Gauge							
		A		Absolute							
		S		Sealed gauge							
		Code		Pressure connection							
		0 or null		O-ring							
		Code		Compensation							
		L		Laser trimming							
		Code		Electrical connection							
		1		Kovar pin							
	2*		100mm silicon rubber flexible wires								
MPM285	08	G	0	L	1	the whole spec					
*The default code for electrical connection is “1”on the parameter card. And it is also allowed to print code “1” if the electrical connection is flexible wire (original code “2”). The wire length shall be as per customers’ request on the contact.											

- Notes:
- 1. The default unit of the company’s products is kPa, 1kPa=0.01bar.
 - 2. We suggest you to use Suspended construction when you install the sensor to prevent affecting sensor stability.
 - 3. Please pay attention to protect sensor isolated diaphragm and ceramic compensated board, to avoid damaging sensor or affecting the performance.
 - 4. Temperature resistant range of standard FKM O-ring of sensor is -20 °C ~250 °C . When working temperature is lower than -20 °C or sensor is applied in critical environment, please contact us.