



bar

MPM3801GRF

FEATURES

- Low power consumption with temperature compensation
- Compact structure with full stainless steel
- Standard I²C or SPI protocols
- Suitable for gas roots flowmeter, waistwheel flowmeter
- RoHS approved

APPLICATIONS

- Process industry control
- Gas flowmeter industry
- Intelligent pressure instrument
- Medical equipment
- IoT



MICROSENSOR

AUTHORIZED DISTRIBUTOR

The MPM3801GRF digital pressure transmitter adopts the MPM3801 stainless steel oil-filled sensor as the sensing element, has the stainless-steel housing. Its wetted material is stainless steel, which has excellent corrosion resistance and long-term stability. The sensor is temperature compensated to ensure that the technical parameters such as zero point, sensitivity, linearity and stability are well maintained within the operating temperature range.

SPECIFICATIONS

Range	0mbar ~ 70mbar/200mbar/350mbar/700mbar/1bar/ 2bar/3.5bar/5bar/7bar/10bar/16bar/20bar/35bar/70bar
Overpressure	≤2 times FS
Pressure Type	gauge, absolute, sealed gauge
Pressure Accuracy	see Accuracy on page 2
Temperature Accuracy	±1.5°C (tested in constant temperature for reference)
Long-term Stability	±0.2%FS/year
Compensated Temperature	-10°C ~ 50°C
Application Temperature	-20°C ~ 80°C
Storage Temperature	-20°C ~ 85°C
Vibration	10g, 20Hz ~ 2000Hz
Shock	100g, 11ms
Housing Protection	IP67
Weight	≤100g

■ ACCURACY

Pressure Type			Accuracy
Gauge (G)	Absolute (A)	Sealed Gauge (S)	Load Resistance
0mbar ~ 70mbar			±1%FS
0mbar ~ 200mbar			
0mbar ~ 350mbar	0mbar ~ 350mbar		
0mbar ~ 700mbar	0mbar ~ 700mbar		±0.5%FS
0bar ~ 1bar	0bar ~ 1bar		
0bar ~ 2bar	0bar ~ 2bar		
0bar ~ 3.5bar	0bar ~ 3.5bar		±0.25%FS
0bar ~ 5bar	0bar ~ 5bar		
0bar ~ 7bar	0bar ~ 7bar		
0bar ~ 10bar	0bar ~ 10bar		
0bar ~ 16bar	0bar ~ 16bar		
0bar ~ 20bar	0bar ~ 20bar		
0bar ~ 35bar	0bar ~ 35bar	0bar ~ 35bar	
	0bar ~ 70bar	0bar ~ 70bar	±0.5%FS


When the range <70bar, the accuracy is the accuracy between the compensated temperature(-10℃ ~ 50℃),
when the range ≥70bar, the accuracy is the accuracy at 20±5℃
Test standard: GB/T 17614.1-2015/IEC60770-1:2010

■ OUTPUT SIGNALS

Output Signal	Power Supply	Output Digits	Output Digital Value	Consumption
I²C	3.3V±0.1V DC (default)	14 digits (maximum is 16383)	1638 (zero) ~ 14746 (span)	5uA (standby)@25℃
	5V±0.1V DC			
SPI	3.3V±0.1V DC (default)			
	5V±0.1V DC			

Note: There are 14-digits for sensor pressure output digital value. The maximum digital value is 16383, but in order to reserve a certain value for overpressure, 10%~90% of span value is chosen for output zone, its zero and full values are 1638 and 14746 respectively.

OUTLINE DIMENSIONS (UNIT:mm)

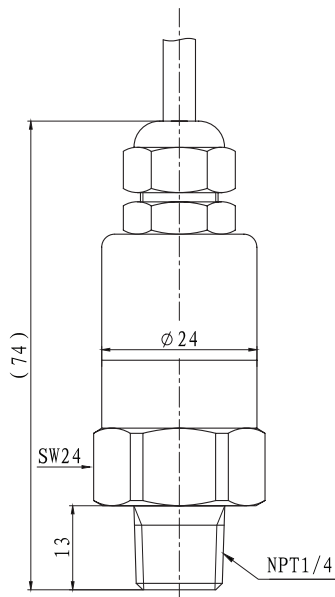

ELECTRICAL CONNECTION

Color	I ² C	SPI
Black	V-	V-
Red	V+	V+
Green	SCL	SCLK
White	SDA	MISO
Yellow	null	SS

MATERIALS

Wetted Parts

Isolated Diaphragm: SS 316L

Pressure Port: SS 304/SS 316L

Non-wetted Parts


Housing: SS 304/SS 316L

Cable: PUR


PROCESS CONNECTION (UNIT:mm)

Process Connection Dimensions


G1/4 Male, End Face Seal (C2)



M20×1.5 Male, Waterline (C5)



NPT1/4 Male (C6)

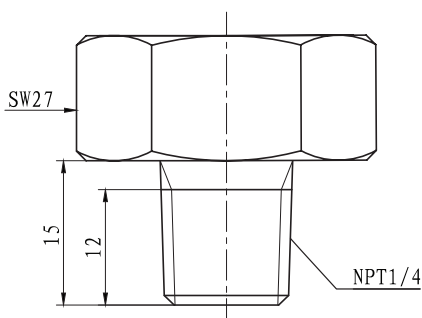

ORDER GUIDE

MPM3801GRF		Digital Pressure Transmitter											
		Range	measurement range: 0mbar ~ 70mbar/200mbar/350mbar/700mbar/1bar/2bar/3.5bar/5bar/7bar/10bar/16bar/20bar/35bar/70bar										
		[0 ~ X]mbar or bar	X: actual measurement range										
			Code	Power Supply									
			3	3.3V±0.1V DC (default)									
			5	5V±0.1V DC									
				Code	Communication Interface								
				C	I²C								
				D	SPI								
					Code	Pressure Type							
					G	gauge							
					A	absolute							
					S	seales gauge							
						Code	Description						
							Isolated Diaphragm	Pressure Port		Housing			
						22	SS 316L		SS 304		SS 304		
						24	SS 316L		SS 316L		SS 316L		
							Code	Process Connection					
					C2	G1/4 male, end face seal							
					C5	M20×1.5 male, waterline							
					C6	NPT1/4 male							
MPM3801GRF	[0 ~ 10]bar	3	C	G	22	C2	Complete Type Specification						

Notes

- MPM3801GRF cable material is PUR, the recommended cable length ≤2m.
- For special requirements, please contact us and specify it in the order.