



bar MPM4736

FEATURES

- Extremely low consumption and available for auto stand-by mode
- Integrated temperature measurement
- Digital compensation and non-linearity correction
- RS485 communication interface
- Suitable for networking
- Stainless steel housing, compact and light
- Customizable



MICROSENSOR
AUTHORIZED DISTRIBUTOR

MPM4736 digital pressure transmitter is a highly precise and stable digital transmitter for the pressure measurement. This product utilizes the highly reliable piezoresistive OEM pressure sensing element and the high precision digital processing circuit, coupled with a dedicated algorithm, the transmitter is capable of high precision measurement.

The product supports the measurement of both pressure and temperature and communicate via an RS485 interface. The transmitter consumes very low power and automatically enters standby mode when not communicating, and the power consumption at standby mode is as low as 10uA.

SPECIFICATIONS

Measured range	-1bar...0bar ~ 0.1bar...100bar
Overpressure	≤1.5 times FS or 1100bar (min. value is valid)
Total accuracy ¹	±0.25%FS (-10°C ~70°C)
Temperature accuracy ²	±0.5°C(-20°C~ 80°C) ±0.75°C(-30°C~ -20°C)
Long-term stability	±0.25%FS/year
Compensation temperature	-10°C~ 70°C
Operation temperature	-30°C~ 80°C(4-pin angular connector model and 7-pin aviation plug model) -10°C~ 70°C(cable outlet model)
Storage temperature	-40°C~ 85°C(4-pin angular connector model and 7-pin aviation plug model) -20°C~ 85°C(cable outlet model)
Power supply	3.6V ~ 28V DC
Output signal	RS485 (ModBus RTU or ASCII)
Load	RS485 terminal can cascade up to 99 transmitters
Electrical connection	4-pin Angular Connector(DIN43650)
	7-pin Aviation Plug
	Φ7.4mm shielded cable outlet
Insulation resistance	100MΩ @ 500V DC
Vibration	20g, 20Hz ~ 2000Hz
Shock	20g, 11ms
Weight	~210g
Protection class	IP65 (Angular connector model) IP68 (Cable outlet model) IP63 (7-pin Aviation plug type)
Wetted material	Diaphragm: Stainless steel 316L
	Housing: Stainless steel 304
	O-ring seal: Viton

¹ Total accuracy: including non-linearity, hysteresis, repeatability and temperature error.
² Temperature accuracy: measured temperature is ambient temperature.

ELECTRICAL CONNECTION

Transmitter connection diagram see the table below.


Connection	B1 Type Pin Code	B2 Type Wire Color	B3 Type Pin Code
+V	1	Red	1
-V	2	Black	2
RS485A	3	Yellow (Green)	4
RS485B	4	White	5

ASSISTANT SOFTWARE


RS485 Communication Software

MS Setonline 3.00 communication software can be used to read the basic information (including level range and temperature compensation range, version, etc.) of the transmitter with RS485 interface, display the actual level value, set the new zero point, configure the analog output, and set the instrument address with the assistance of a RS485 conversion module.


Note: The "MS Setonline 3.00" software can be downloaded from Micro Sensor website.

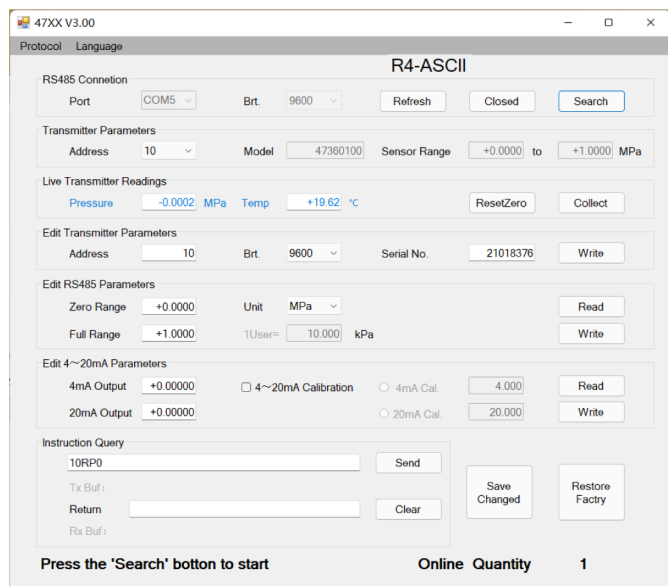


OUTLINE CONSTRUCTION (UNIT:mm)

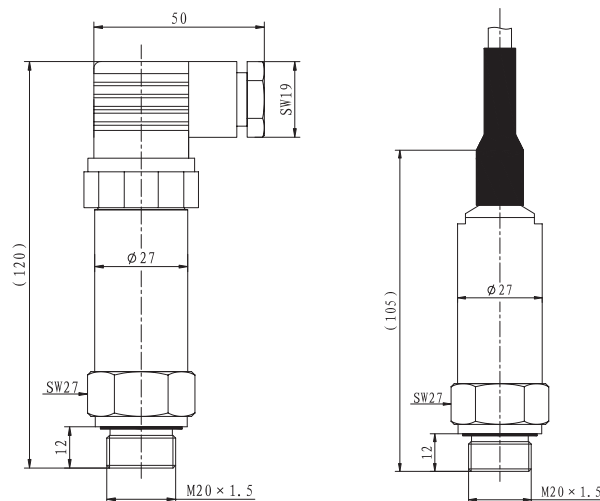

B1 4-pin Angular Connector Model B2 Cable outlet model

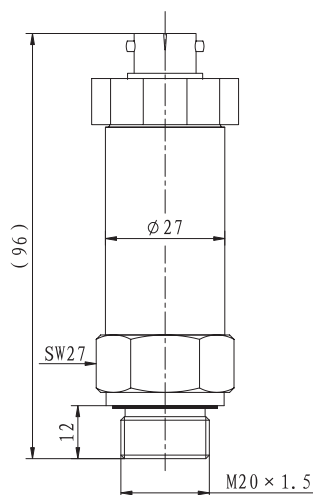

B3 7-pin Aviation plug model

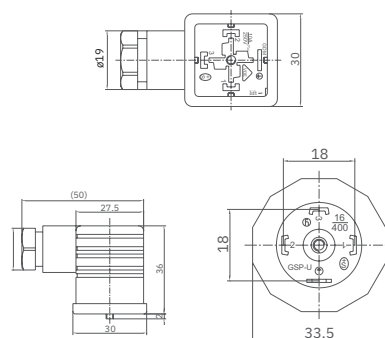

B1 4-pin Electrical Connector Dimension

ORDER GUIDE

MPM4736		Digital Pressure Transmitter					
		Range		-1bar...0bar ~ 0.1bar...1000bar			
		[0 ~ X]bar		X=actual measured range			
				Code	Output Signal		
				R ₄	RS485 Communication Interface, ASCII protocol		
				R ₈	RS485 Communication Interface, MODBUS RTU protocol		
				Code	Construction material		
					Diaphragm	Pressure port	Housing
				22	S.S.316L	S.S.	S.S.
				24	S.S.316L	S.S.316L	S.S.316L
					Code	Others	
					B ₁	Angular 4-pin connector	
					B ₂	Cable outlet, 1.5meter length by default	
					B ₃	Aviation 7-pin plug	
					PC ₁	Flush diaphragm, M20*1.5 Male	
					PC ₃	Flush diaphragm, G1/2 Male	
					C ₁	M20*1.5 Male, face seal	
					C ₂	G1/4 Male	
		C ₃	G1/2 Male				
		C ₅	M20*1.5 Male, waterline seal				
		G	Gauge				
		S	Sealed Gauge				
		A	Absolute				
MPM4736	[0~1]bar	R ₄	22	B ₃ C ₁ G	Complete part number		

- Notes:
- The available measured range for the flush diaphragm transmitter is 0bar ~ 0.7bar...350bar.
 - For special requirements, please contact us and note on the purchase order.