



aCTA Hot-wire Bridge

The acoustic CTA is a full-fledged hotwire bridge to perform dynamic flow velocity measurements in air. The calibrated velocity range in air reaches up to 50 m/s, higher velocities are possible. Due to the measurement principle, the aCTA is especially suited for low flow velocities. The device can be used for other non-corrosive gases as well, in which case a special calibration is needed.

The aCTA is „plug and play“ ready to use with hotwire probes of the type HWP10/xx. No pre-set or adjustments must be made.

As output signal the device provides a voltage of ± 10 V. Based on the calibration data, the fluid temperature and the air density it can be converted into the flow velocity. An integrated 5 kHz lowpass filter prevents unwanted alias-effects. Optionally, there is an unfiltered output for measurements up to 10 kHz.

Via AC-decoupling of the signal flow fluctuations can be made audible. A headphone can be directly connected to the 3.5 mm phone jack. This provides an intuitive method to gain information about interferences in acoustically striking flows.


The power supply is driven by a plug-in power supply or alternatively via a DC voltage source with an output range from 9 to 18 V.



FEATURES

- Dynamic measurements of flow velocities
- Velocity range: 0.1 – 50 m/s in air, higher velocities and other gases possible
- Measurement accuracy: 0.1 m/s + 0.5% FS ($v < 20$ m/s) / 1% FS ($20 \text{ m/s} \leq v < 50$ m/s)
- Different hot-wire probes are available
- Plug & play
- Acoustic analysis via headphone

COMPONENTS

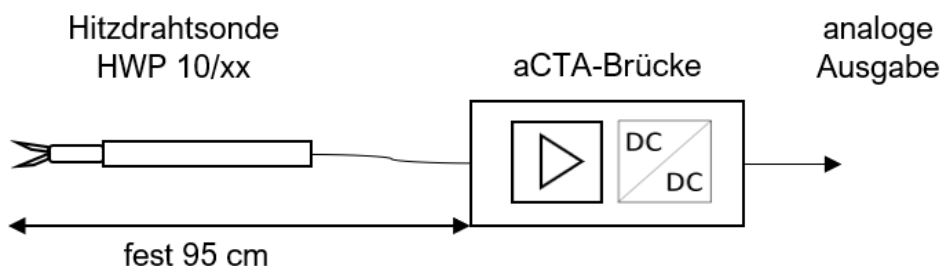

■ TECHNICAL SPECIFICATIONS

Range of use of the probes	
Velocity range	0.1 - 50 m/s higher velocities possible
Frequency resolution	0...5 kHz with 3 dB lowpass, unfiltered up to about 10 kHz
Fluid	Air, other non-corrosive gases are possible but must be calibrated separately no particles, no air pollution
Temperature	10... 50°C within factory calibration, -10... 70°C possible
Humidity	Non-condensing
Measurement accuracy	
Velocity 0...20 m/s	0.1 m/s + 0.5% of reading
Velocity 20...50 m/s	1% full-scale
Electrical parameters	
Supply	9...18 V DC, min. 0.5 A, 10 W
Signal	±10 V
Headphone	min. 32 Ohm
Connections	
Supply / signal / enable	Binder 711/712, 4 pin
Signal	BNC
Hot-wire probe	Binder 711, 2 pin
Headphones	3.5 mm audio jack
Ambient conditions for electronics	
Temperature	5° C...40°C
Humidity	Non-condensing
Dimensions	
aCTA hot -wire bridge	150 mm x 56 mm x 24 mm



■ ORDERING OPTIONS

aCTA

- 1x hot-wire bridge
- 1x power supply

aCTA-set

- 1x hot-wire bridge
- 1x power supply
- 1x headphone
- 2x hot-wire probes HWP10/xx at buyer's option
- Carrying case