



bar

AHI2000 HISPEC® High Precision Pressure Transducer

- High accuracy and performance
- Silicon-on-Sapphire sensortechnology for outstanding stability
- Pressure ranges to 1.500 bar
- Titanium wetted parts for excellent chemical compatibility
- High thermal stability over wide operating temperature
- ATEX/IECEx option available (includes M1 for mining applications)



DESCRIPTION

The HISPEC AHI2000 series of pressure transducers with state-of-the-art Silicon-on-Sapphire sensor technology offer levels of accuracy and performance previously unobtainable or prohibitively expensive.

The unique Silicon-on-Sapphire sensor technology provides outstanding performance and gives excellent stability over a wide temperature range. The advanced sensor design consists of a piezoresistive silicon strain gauge circuit, which is epitaxially grown onto the surface of a sapphire diaphragm to form a single crystalline structure. The sapphire sensor element is then molecularly bonded to a Titanium alloy sub-diaphragm. This enables the sensor to endure higher over- pressures and provides superb corrosion resistance. The sensor exhibits virtually no hysteresis and excellent long-term stability. With outstanding insulation properties, the sapphire substrate allows the sensor to operate over a very wide temperature range without loss of performance.

A TEDS (Transducer Electronic Data Sheet) version is available. A TEDS contains the critical information needed by an instrument or measurement system to identify, characterize, interface, and properly use the signal from an analog sensor. IEEE 1451.4 defines the method of encoding TEDS information for a broad range of sensor types and applications.

Applications include aerospace, laboratory and test, oil and gas monitoring equipment (down-hole) and subsea. Available in pressure ranges from 0-500 mbar to 0-1.500 bar and with electrical outputs of 10 mV/V, 0-5 dc and 0-10 Vdc. An optional ATEX and IECEx approved version of this product is available for explosion protection for flammable gases (zone 0), dusts (zone 20) and mining areas (group I M1).






DIMENSIONS (in mm)

**ELECTRICAL CONNECTION
MIL-C-26482**

Pin.	Designation
A	+ supply
B	+output
C	-output
D	-supply
E	N/C
F	N/C

**ELECTRICAL CONNECTION
CABLE OUTLET**

WIRE COLOUR	Designation
RED	+supply
GREEN	+output
YELLOW	-output
BLUE	-supply

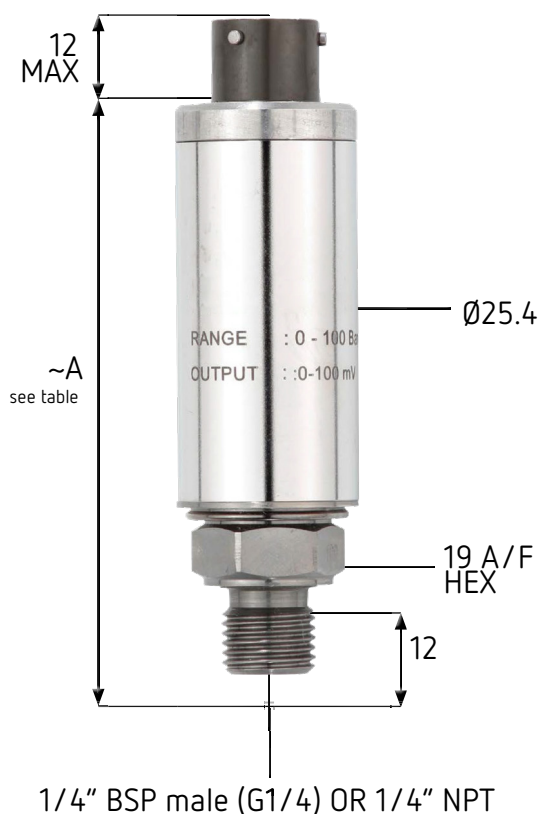

Dim.A

AHI2000	80
AHI2001/2	95
AHI2010	80
AHI2011/12	95



TECHNICAL DATA

Type:	AHI2000/AHI2010	AHI2xx1/AHI2xx4	AHI2xx2/AHI2xx5
Sensor Technology:	Silicon-on-Sapphire (SoS)		
Output signal:	10 mV/V (4 wire)	0 - 5V (4 or 3 wire)	0 - 10V (4 or 3 wire)
Supply Voltage:	10 VDC (5-15V)	13-30 VDC	13-30 VDC
Pressure Reference:	Gauge		
Protection of Supply Voltage:	n/a	Protected against supply voltage reversal up to 50 V (amplified versions)	
Standard Pressure Ranges (bar):	0-1 bar Vac; 0-1 bar; 0-10 bar; 0-25 bar; 0-100 bar; 0-250 bar; 0-400 bar; 0-600 bar; 0-1,000 bar; 0-1,500 bar (other ranges available)		
Standard Pressure Ranges (psi):	0-30 in Hg; 0-15 psi; 0-150 psi; 0-300 psi; 0-1,500 psi; 0-3,000 psi; 0-6,000 psi; 0-10,000 psi; 0-15,000 psi; 0-20,000 psi (other ranges available)		
Overpressure Safety:	4x for 0.5 bar range; 2 x for ranges 1 bar to 600 bar; 1.5x for 1,000 bar range; 1.1x for 1,500 bar range		
Load Driving Capability:	10 mV/V: n/a; 0-5 V: max. load RL > 5 KΩ; 0-10 V: max. load RL > 10 KΩ		
Accuracy NLHR:	≤ ±0.1 % of span BFSL		
Zero Offset and Span Tolerance:	±0.5% FS at room temperature (AHI2000/AHI2010: ±1 mV)		
Operating Ambient Temperature:	- 40 °C to +85 °C (-40 °F to +185 °F)		
Operating Media Temperature:	- 50 °C to +125 °C (-58 °F to +257 °F)		
Storage Temperature:	+5 °C to +40 °C (+41 °F to +104°F) Recommended Best Practice		
Temperature Effects:	±1.0 %FS total error band for -20 °C to +70 °C. Typical thermal zero and span coefficients ±0.005 %FS/°C		
ATEX/IECEX Approval Option (mV version only):	Ex II 1 G Ex ia IIC T4 Ga (zone 0) Ex II 1 D Ex ia IIIC T135 °C Da (zone 20) Ex I M 1 Ex ia I Ma (group 1 M1)	n/a	n/a
ATEX/IECEX Safety Values:	Ui = 28 V; Ii = 119 mA Pi = 0.65 W ; Li = 0.1 μH Ci = 0; Temperature Range = -20 °C to +70 °C Max. cable length = 50 m	n/a	n/a
TEDS:	IEEE 1451.4 Sensor TEDS (contact sales for more information)		
Electromagnetic Capability:	Emissions: EN61000-6-4 Immunity: EN61000-6-2 Certification: CE Marked		
Insulation Resistance:	> 100 MΩ @ 50 VDC		
Response time 10-90 %:	1 mS		
Wetted Parts:	Titanium alloy		
Pressure Media:	All fluids compatible with Titanium alloy		
Pressure Connection:	1/4" BSP male (G1/4) or 1/4" NPT male (others options available)		
Electrical Connection:	HI200x: PTFE insulated flying lead, conductor size 7/0.1 mm. HI201x: MIL-C-26482 6 pin bayonet connector (Accessory not included: mating connector type MS3116F10-6S).		



ORDER MATRIX

Output		Wires	Type	Electrical Connector	Pressure Range	Process Connection	Calibration			
10 mV/V	Cable outlet 1m PTFE	4	AHI2000							
0-5 V		4	AHI2001							
0-10 V		3	AHI2004							
		4	AHI2002							
10 mV/V		3	AHI2005							
	4	AHI2010								
0-5 V	MIL-C-26482 6 pin bayonet	4	AHI2011							
0-10 V		3	AHI2014							
		4	AHI2012							
		3	AHI2015							
Electrical Connection / Option										
No special option required				-						
ATEX/ IECEx certified (AHI2000 & AHI2010 only)				EX						
Pressure Range in bar										
0-1 bar Vac					V001					
0-1 bar					0001					
0-10 bar					0010					
0-25 bar					0025					
0-100 bar					0100					
0-250 bar					0250					
0-400 bar					0400					
0-600 bar					0600					
0-1,000 bar					1000					
0-1,500 bar					1500					
Process Connection										
1/4" BSP male (G1/4)						AB				
1/4" NPT Male						AM				
AHI 20 00 EX 002 0 AB										
Calibration										
5-point calibration certificate							5P			
10-point calibration certificate							10P			

Order Number Example

For options not listed please contact sales team.