



**N** ALF 255



**Description**

- Measurement ranges 0 ... 100 N to 0 ... 6.4 kN
- Tension / compression
- Non-linearity 0.5 % v.E.
- Output signal 1.6 mV/V or rationalised 1.0 mV/V  $\pm 0.5$  %
- Supply voltage 10 VDC


The ALF255 load cell is ideally suited to force measurements in confined spaces in both tension and compression for control of critical parameters in all kinds of industrial processes. Their versatility is such that they are also applied in a great number of important fields of scientific and engineering test work, mobile as well as workshop, static and dynamic.

**Geometry:**

Very small loadbutton cell for force measurement in confined spaces. Used in compression and/or tension on a wide range of OEM or end-user applications.

With bi-directional versions there is a small difference between the output signal for compression and tension. All standard bi-directional load cells are calibrated in both modes and the output for each direction is stated on the test / calibration certificate.

**Dimensions**

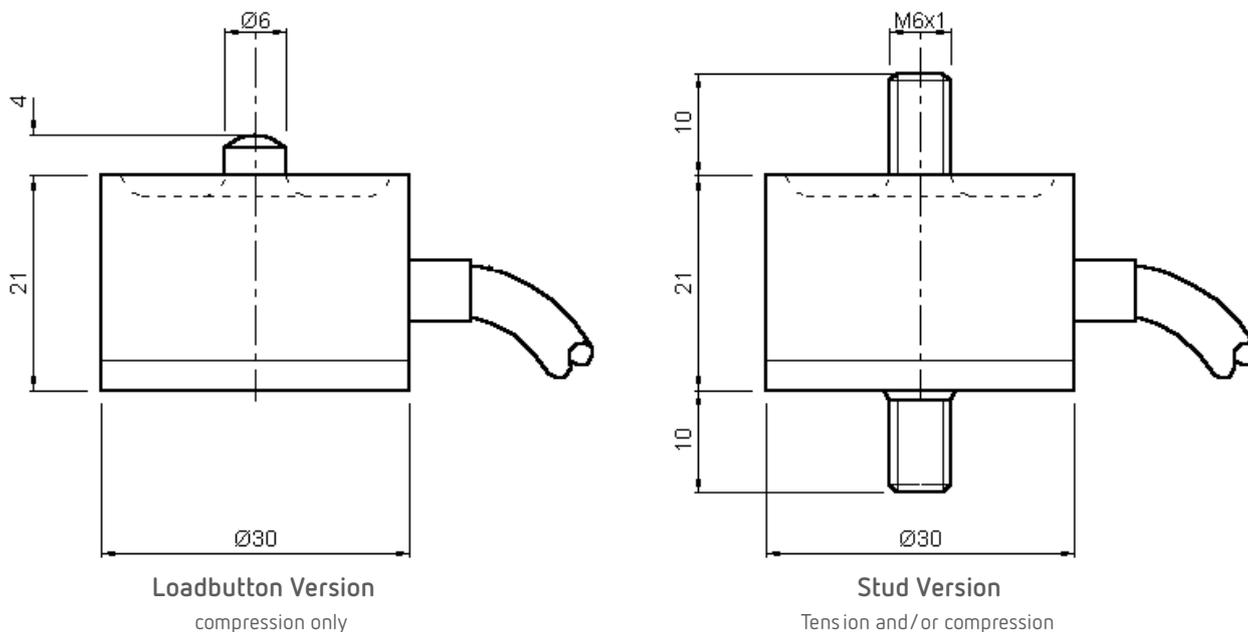

Dimensions in „mm“, approx. values

These drawings are for information only and not intended for construction purpose.  
Please contact us for detailed drawings.

## Specifications

Rated load:	100 N, 200 N, 400 N, 800 N, 1.6 kN, 3.2 kN, 6.4 kN
Non-linearity, terminal:	±0.5 % RL
Hysteresis:	±0.5 % RL
Creep, 20 min:	±0.1 % AL
Repeatability:	±0.1 % RL
Rated output, nominal:	1.6 mV/V
Rated output, rationalised:	1.0 mV/V ±0.5 % RL Rationalisation tolerance applies to single direction calibrations only
Zero load output:	±4 % RL
Temperature effect on rated output:	±0.005 % AL/K
Temperature effect on zero load output:	±0.03 % RL/K
Compensated temperature range:	-10 ... +50 °C
Operating temperature range:	-10 ... +80 °C
Supply voltage, recommended:	10 V
Supply voltage, max.:	10 V
Bridge resistance:	350 Ω Insulation
resistance, minimum at 50 VDC:	500 MΩ Overload,
safe:	150 % RL
Overload, ultimate:	200 % RL
Environmental sealing:	IP65
Material:	Stainless steel

Rated load	Structural stiffness, nom.	Rated load	Structural stiffness, nom.
100 N	$3.5 \times 10^6$ N/m	1.6 kN	$5.6 \times 10^7$ N/m
200 N	$7.1 \times 10^6$ N/m	3.2 kN	$1.1 \times 10^8$ N/m
400 N	$1.4 \times 10^7$ N/m	6.4 kN	$2.2 \times 10^8$ N/m
800 N	$2.8 \times 10^7$ N/m		

### Notes:

1. RL = rated load
2. AL = applied load
3. Temperature coefficients apply over the compensated range.
4. The load must be applied directly through the central loading axis.
5. When this load cell is rationalised the resistors are housed in a capsule located in the load cell cable 100 mm from the free end. Capsule dimensions are Ø10 mm by 57 mm.

## Electrical Connection

The load cell is fitted with 2 m PVC insulated 4 core screened cable type 7-1-4C.

Reverse the signal connections to obtain a positive signal in tension mode. The screen is not connected to the load cell body.

### Wiring:

Red	+ Supply voltage
Blue	- Supply voltage
Yellow	+ Output signal
Green	- Output signal
Orange	Screen

## Ordering Codes

ALF255CFR0H0	Compression, loadbutton, IP65	ALF255CFR0HN	Compression, loadbutton, IP65, rationalised
ALF255DFR0H0	Compression, stud, IP65	ALF255DFR0HN	Compression, stud, IP65, rationalised
ALF255TFR0H0	Tension, stud, IP65	ALF255TFR0HN	Tension, stud, IP65, rationalised
ALF255UFR0H0	Bi-directional, stud, IP65	ALF255UFR0HN	Bi-directional, stud, IP65, rationalised

Please add range.

### Safety note:

When using the load cell in tension mode it is essential to provide additional safety precautions like safety chains etc. for catching the load in a breakage, which cannot be excluded completely.

Due to continuous product development, ALTHEN and partners reserve the right to vary the foregoing details without prior notice.

The information provided herein is to the best of our knowledge true and accurate, it is provided for guidance only. All specifications are subject to change without prior notification.

Althen – Your expert partner in Sensors & Controls | [althensensors.com](http://althensensors.com)

Althen stands for pioneering measurement and custom sensor solutions. In addition we offer services such as calibration, design & engineering, training and renting of measurement equipment.