



bar

APR3200 PROTRAN®

Differential Pressure Transmitter

SPECIFICATIONS

- Wide range of pressure ranges to 200 bar DP
- WET/WET or DRY/DRY operation
- Available for gauge reference or bi-directional measurement
- Durable designs for industrial and commercial installations
- R.F.I. Shielded for protection against electromagnetic radiation
- ATEX/IECEx option available (includes M1 for mining applications)



The APR3200 differential pressure transmitter uses two titanium alloy pressure sensors, offering high stability and performance with true wet/wet operation, suitable for use with all liquids and gases compatible with stainless steel and titanium.

The unique Silicon-on-Sapphire sensor technology provides outstanding performance and gives excellent stability over a wide temperature range. The sensor can endure higher overpressures and provides superb corrosion resistance, with virtually no hysteresis. The outstanding insulation properties allow the sensor to operate over a very wide temperature range without loss of performance.

Applications include flow measurement with orifice plates and mass flow meters, plus static differential pressure measurement and control in combustion chambers, also condition monitoring and filter monitoring in high pressure hydraulic systems or any application on liquid or gas requiring reliable differential pressure measurement. Electrical connector is DIN plug and socket. Access to zero and span adjustment is by removing top plate for easy on-site adjustment. Pressure connection as standard is via two 1/4" BSP female connections.

A mounting plate is available for bulkhead mounting. Ranges available from 0-500 mbarDP to 0-200 barDP

An optional ATEX and IECEx approved version of this product is available for explosion protection for flammable gases (zone 0), dusts (zone 20) and mining areas (group I M1).





DIMENSIONS (in mm)


ELECTRICAL CONNECTION (mA)

Pin No.	2 wire
1	+supply
2	4-20mA signal
3	N/C
⏏	to case

ELECTRICAL CONNECTION (Vdc)

Pin No.	4 wire	3 wire
1	-supply	common
2	+supply	+supply
3	+output	+output
⏏	-output	to case

1/4" BSP
FEMALE
BOTH
SIDES
(19mm spanner flats)

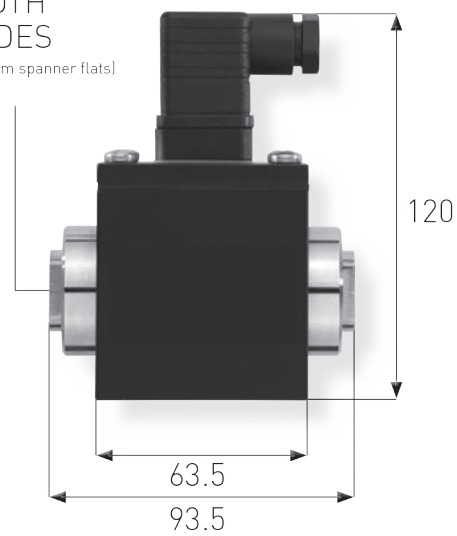



■ TECHNICAL DATA

Type	APR3200	APR3210 / APR3230	APR3220 / APR3240
Sensor Technology:	Silicon-on-Sapphire (SoS)		
Output Signal:	4-20 mA (2 wire)	0-5 V (4 or 3 wire)	0-10 V (4 or 3 wire)
Supply Voltage:	10-36 VDC	10-36 VDC	13 – 30 VDC
Pressure Reference:	Differential		
Protection of Supply Voltage:	Protected against supply voltage reversal up to 50 V		
Standard Pressure Ranges (bar):	0-0.5 bar; 0-1 bar; 0-10 bar; 0-20 bar; 0-40 bar; 0-100 bar; 0-200 bar (other options available)		
Standard Pressure Ranges (psi):	0-7.5 psi; 0-15 psi; 0-150 psi; 0-750 psi; 0-1,500 psi; 0-3,000 psi (other ranges available)		
Overpressure Safety:	1.5x maximum static line pressure for all ranges		
Common Mode (Static line pressure):	2.5 bar for 0-0.5 bar range; 4 bar for 0-1 bar range; 40 bar for 0-10 bar range; 60 bar for 0-20 bar range; 160 bar for 0-40 bar range; 400 bar for 0-100 bar range; 600 bar for 0-200 bar range		
Load Driving Capability:	4-20mA: $RL < [UB - 10 V] / 20 \text{ mA}$ (e.g. with supply voltage (UB) of 36V, max. load (RL) is 1300 Ω)		
Accuracy NLHR:	$\leq \pm 0.3 \%$ of span BFSL (Optional higher accuracy version of $\leq \pm 0.1 \%$ of span BFSL available)		
Zero Offset and Span Tolerance:	$\pm 1.0\%$ FS at room temperature $\pm 5\%$ FS (approx.) adjustment with easy access trimming potentiometers		
Operating Ambient Temperature:	-20 °C to +85 °C (-4 °F to +185 °F)		
Operating Media Temperature:	-20 °C to +85 °C (-4 °F to +185 °F)		
Storage Temperature:	+5 °C to +40 °C (+41 °F to +104°F) Recommended Best Practice		
Temperature Effects:	$\pm 3.0\%$ FS total error band for -20 °C to +70 °C. Typical thermal zero and span coefficients $\pm 0.05\%$ FS/ °C		
ATEX/IECEx Approval Option (4-20 mA version only):	Ex II 1 G Ex ia IIC T4 Ga (zone 0) Ex II 1 D Ex ia IIIC T135°C Da (zone 20) Ex I M 1 Ex ia I Ma (group 1 M1)	N/A	
ATEX/IECEx Safety Values:	Ui = 28 V Ii = 119 mA, Pi = 0.65 W Li = 0.1 μ H, Ci = 74 nF Temperature Range = -20 °C to +70 °C Max. cable length = 45 m	N/A	
Electromagnetic Compatibility:	Emissions: EN61000-6-3; Immunity: EN61000-6-2; Certification: CE Marked		
Insulation Resistance:	> 100 M Ω @ 50 VDC		



ORDER MATRIX

Output	Wires	Type	Electrical Connection/ Options	Pressure Range	Process Connection
4-20 mA	2	APR3200			
0-5 V	4	APR3210			
	3	APR3230			
0-10 V	4	APR3220			
	3	APR3240			
Electrical Connection/Options					
DIN EN175301 plug and socket			-		
ATEX/ IECEx certified			EX		
Pressure Range in mbar/ bar					
0-500 mbar				00.5	
0-1 bar				0001	
0-10 bar				0010	
0-50 bar				0050	
0-100 bar				0100	
0-200 bar				0200	
Process Connection					
1/4" BSP female					AR
1/4" NPT female					AS
Order Number Example		APR3200-0200AR			

For options not listed please contact the sales team