



DV301

Cable Actuated Sensor

Instrument Grade • Position/Velocity

Position and Velocity Output Signals
Stroke Range Options: 0–2 to 0–100 inches
Powder Painted & Anodized Aluminum Enclosure
Industrial Automation & Testing Applications

General

Full Stroke Range	0-2 to 0-100 inches
Measuring Cable	.019-inch dia. nylon-coated stainless steel rope
Enclosure Material	powder-painted and anodized aluminum
Weight	2 lbs. max.

Position


Output Signal	voltage divider (potentiometer)
Accuracy	± 0.25% to ±0.10% full stroke (see ordering information)
Repeatability	± 0.02% full stroke
Resolution	essentially infinite
Sensor	plastic-hybrid precision potentiometer
Input Resistance	500, 1K, 5K or 10K Ω
Power Rating, Watts	2.0 at 70°F derated to 0 at 250° F
Maximum Input Voltage	see ordering information
Output Signal Change Over Full Stroke Range	94% ±4% of input voltage

Velocity

Output Signal	DC tachometer output
Linearity	better than ±0.10% of output at any velocity
Repeatability	±0.10% of reading
Maximum Velocity • Retraction Acceleration	see ordering information
Sensor	tach generator
Input Voltage	none required
Output Voltage @ 100 inches per minute	see ordering information
Output Impedance	350 ohms ±10%
Output Ripple (when output ≥ 280 mV)	±3% rms

The DV301 is a combination position and velocity transducer for full-scale measurement ranges from 2 to 100 inches. A precision plastic-hybrid potentiometer provides accurate position feedback while a self-generating DC tachometer provides a velocity signal that is proportional to the speed of the traveling stainless-steel measuring cable.


Electrical Output Signals

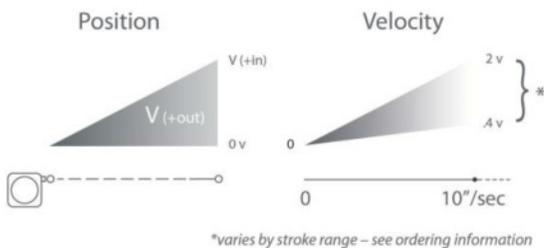


DV301

Instrument Grade • Position/Velocity

Outline Drawing

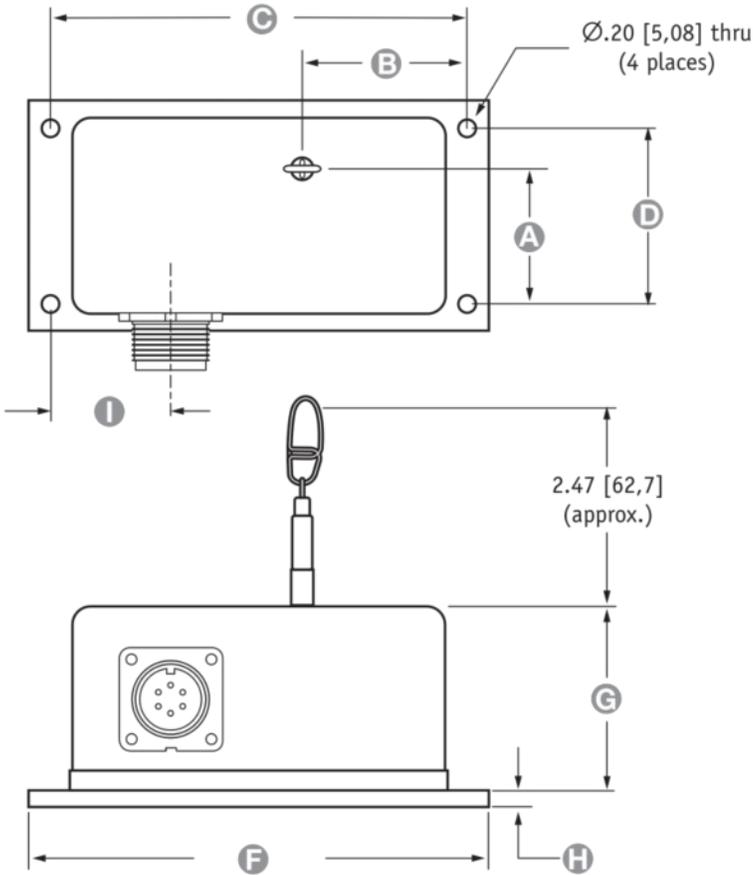

ALL DIMENSIONS ARE IN INCHES [MM]
tolerances are ± 0.02 in. [$\pm 0,5$ mm]

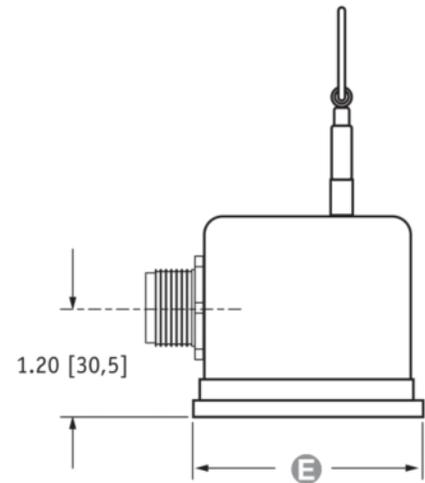

ALL DIMENSIONS ARE IN INCHES [MM] • tolerances are ± 0.02 in. [$\pm 0,5$ mm]

Range	A	B	C	D	E	F	G	H	I
2", 10", 20"	1.34 [34,0]	4.00 [101,6]	7.00 [177,8]	2.00 [50,8]	2.63 [66,8]	7.50 [190,5]	2.10 [53,3]	.16 [4,1]	1.37 [34,8]
5", 25", 50"	1.85 [47,0]	4.00 [101,6]	7.00 [177,8]	2.00 [50,8]	2.63 [66,8]	7.50 [190,5]	2.10 [53,3]	.16 [4,1]	1.37 [34,8]
15", 30"	1.51 [38,4]	4.00 [101,6]	7.00 [177,8]	2.00 [50,8]	2.63 [66,8]	7.50 [190,5]	2.10 [53,3]	.16 [4,1]	1.37 [34,8]
40"	1.67 [42,4]	4.00 [101,6]	7.00 [177,8]	2.00 [50,8]	2.63 [66,8]	7.50 [190,5]	2.10 [53,3]	.16 [4,1]	1.37 [34,8]
60"	2.19 [55,6]	3.88 [98,5]	7.00 [177,8]	2.37 [60,2]	3.25 [82,5]	7.50 [190,5]	2.60 [66,0]	.19 [4,8]	1.37 [34,8]
75"	2.52 [64,0]	4.38 [111,3]	6.75 [171,4]	2.50 [63,5]	3.63 [92,2]	7.50 [190,5]	2.86 [72,6]	.19 [4,8]	1.37 [34,8]
100"	3.18 [80,7]	5.18 [131,5]	7.38 [187,5]	3.00 [76,2]	4.25 [108,0]	8.00 [203,2]	3.80 [96,5]	.19 [4,8]	3.69 [93,7]

Ordering Information

Model Number:

DV301 - - **1** **1** - **1** - **0**

order code: **R** **A** **B** **C** **D** **E** **F** **G**

Sample Model Number:

DV301 - 0025 - 111 - 1110

- R** range: 25 inches
- A** measuring cable tension: standard - 5 oz.
- D** output signals: 500 ohm position / DC tachometer velocity
- F** electrical connection: 6-pin plastic connector

Ordering Information (cont.)

Full Stroke Range:

order code:	0002	0005	0010	0015	0020	0025	0030	0040	0050	0060	0075	0100
full stroke range, min:	2 in.	5 in.	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.	60 in.	75 in.	100 in.
position accuracy (% of f.s.):	0.25%	0.25%	0.15%	0.15%	0.10%	0.15%	0.10%	0.10%	0.10%	0.10%	0.10%	0.10%
potentiometer cycle life*1:	2.5 x 10 ⁶	2.5 x 10 ⁶	5 x 10 ⁵	2.5 x 10 ⁵								
velocity output signal (±3%)*2:	322 mV	130 mV	322 mV	217 mV	322 mV*3	130 mV	217 mV*3	165 mV*3	130 mV*3	112 mV	91 mV	66 mV

*1 – 1 cycle is defined as the travel of the measuring cable from full retraction to full extension and back to full retraction *2—at the rate of 100 inches per minute *3 – output signal is reduced by 50% when Measuring Cable Tension options 2 or 3 is selected below

Measuring Cable Tension:

order code:	1	H	M
	standard tension tension, ±30% • max. acceleration	high tension tension, ±40%	max tension tension, ±40%
2, 10, 20 inch range:	39 oz. • 25g	65 oz.	116 oz.
5, 25, 50 inch range:	16 oz. • 5g	26 oz.	47 oz.
15, 30 inch range:	26 oz. • 6g	44 oz.	78 oz.
40 inch range:	21 oz. • 11g	33 oz.	61 oz.
60 inch range:	13 oz. • 4g	22 oz.	40 oz.
75 inch range:	17 oz. • 5g	31 oz.	n/a
100 inch range:	24 oz. • 10g	n/a	n/a

Output Signals:

order code:	1	2	3	4
position sensing potentiometer:	500 ohms*	1000 ohms*	5000 ohms*	10,000 ohms*

position sensing circuit

velocity sensing circuit

	max. input voltage & power rating	
	2-inch, 5-inch range	10-inch to 100-inch range
500-ohms:	20 V AC/DC (1 W)	30 V AC/DC (2 W)
1K to 10K-ohms:	30 V AC/DC (1 W)	30 V AC/DC (2 W)

*tolerance = ±10%

Electrical Connection:

order code:	1	3	4																																		
	6-pin plastic connector with mating plug	6-pin metal connector with mating plug	25-ft. instrumentation cable 24 AWG, shielded																																		
	1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded																																		
	6-pin mating plug: 		25-ft. instrumentation cable: 																																		
	<table style="font-size: x-small; border: none;"> <tr> <td>pin</td> <td>signal</td> <td rowspan="2">} position</td> </tr> <tr> <td>A</td> <td>+ in</td> </tr> <tr> <td>B</td> <td>common</td> <td rowspan="2">} velocity</td> </tr> <tr> <td>C</td> <td>+ out</td> </tr> <tr> <td>D</td> <td>-</td> <td rowspan="2">} velocity</td> </tr> <tr> <td>E</td> <td>+ out</td> </tr> <tr> <td>F</td> <td>- out</td> <td></td> </tr> </table>		pin	signal	} position	A	+ in	B	common	} velocity	C	+ out	D	-	} velocity	E	+ out	F	- out		<table style="font-size: x-small; border: none;"> <tr> <td>color</td> <td>signal</td> <td rowspan="2">} position</td> </tr> <tr> <td>red</td> <td>+ in</td> </tr> <tr> <td>black</td> <td>common</td> <td rowspan="2">} velocity</td> </tr> <tr> <td>green</td> <td>+ out</td> </tr> <tr> <td>white</td> <td>+ out</td> <td></td> </tr> <tr> <td>brown</td> <td>- out</td> <td></td> </tr> </table>	color	signal	} position	red	+ in	black	common	} velocity	green	+ out	white	+ out		brown	- out	
pin	signal	} position																																			
A	+ in																																				
B	common	} velocity																																			
C	+ out																																				
D	-	} velocity																																			
E	+ out																																				
F	- out																																				
color	signal	} position																																			
red	+ in																																				
black	common	} velocity																																			
green	+ out																																				
white	+ out																																				
brown	- out																																				

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.