



mm ERTM

Features


- Internal electronic circuit
- Measuring range 50 600 mm
- Output 4-20mA, 0-20mA or 0-1 OV
- Very stable output signal
- Best solution for automation systems
- Excellent repeatability



Technical Specifications

Measurement stroke	50 to 600 mm
Linearity	±%0,05 (>200mm), ±%0,1 (130-200mm), ±%0,2 (75-130mm), ±%0,5 (<75mm)
Repeatability	< 0,01 mm
Resolution	Infinite
Output	4-20mA, 0-20mA or 0-10V
Permissible applied voltage	15-30 VDC
Electrical connections	4 pin connector
Displacement speed	<1,5 m/s

Mechanical life	100 million cycles
Case dimensions	33 mmx33 mm
Case material	Anodized aluminium
Rod material	Stainless steel
Rod diameter	Ø6 mm
Mechanical fixing	Ball joints on the both side
IP degree	IP 40
Operating temperature	-20°C +80°C
Storage temperature	-30°C +90°C

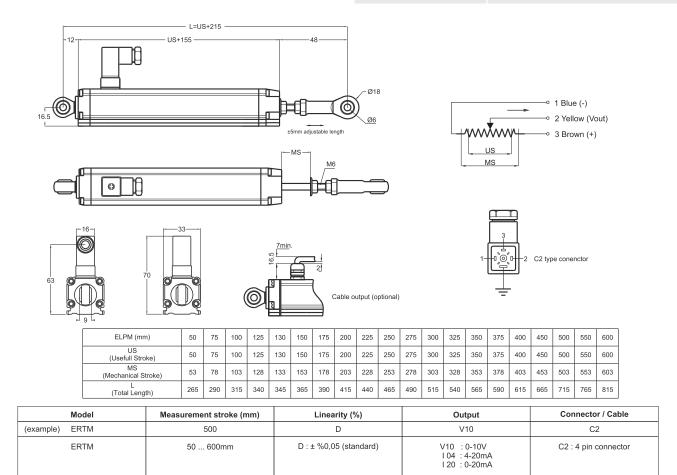

Page 1/1

The information provided herein is to the best of our knowledge true and accurate, it is provided for guidance only. All specifications are subject to change without prior notification.

Althen – Your expert partner in Sensors & Controls | althensensors.com

Althen stands for pioneering measurement and custom sensor solutions. In addition we offer services such as calibration, design & engineering, training and renting of measurement equipment.

Germany/Austria/Switzerland info@althen.de

Benelux sales@althen.nl **France** info@althensensors.fr Sweden info@althensensors.se USA/Canada info@althensensors.com Other countries info@althensensors.com