



bar

KZ Low Range Wet/Wet Differential Pressure Transducer

The Model KZ offers an all-welded stainless steel assembly that eliminates internal "O" ring leaks and material compatibility. The Model KZ line pressure zero shift specification can be reduced to less than 0.5 % FS/1000 psi by the use of an internal line pressure sensor and analog correction circuit. Line pressures are available up to 5000 psig with safe overload of either side up to the maximum line rating. The natural resonant frequency is increased with the Model KZ because of a stiffer pressure sensing element and the all-welded assembly.

A variety of options are available with the Model KZ including choice of pressure adaptors, pressure ports, internal amplifiers, and electrical terminations.



FEATURES

- 0.25 % FS accuracy
- 0.5 psid to 30 psid
- All-welded design
- mV/V (standard), 4 mA to 20 mA, 0 Vdc to 5 Vdc, or 0 Vdc to 10 Vdc output
- CE approved



PRODUCT INFORMATION

PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Pressure ranges	±0.5, 1, 2, 5, 10, 15, 25, 30 psid**
Accuracy	±0.25 % full scale
Linearity	±0.15 % full scale (typical)
Hysteresis	±0.10 % full scale (typical)
Non-repeatability	±0.05 % full scale (typical)
Output (standard) 0.5 psid	1.0 mV/V (nominal)
Output (standard) 1 psid to 4 psid	1.5 mV/V (nominal)
Output (standard) 5 psid to 30 psid	2.0 mV/V (nominal)
Line pressure	1500 psi
Resolution	Infinite

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-1 °C to 88 °C [30 °F to 190 °F]
Temperature, compensated	-1 °C to 54 °C [30 °F to 130 °F]
Temperature, effect, zero	±0.5 % full scale/100 °F
Temperature, effect, span	±0.5 % reading/100 °F

ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Strain gage type	Bonded foil
Excitation (calibration)	10 Vdc
Excitation (acceptable)	Up to 10 Vdc or ac
Insulation resistance	5000 mOhm @ 50 Vdc max.
Bridge resistance	350 ohm (nominal)
Shunt calibration data	Included
Elec. termination (std)	Bendix PTIH-10-6P or equivalent
Mating connector (not incl.)	Bendix PT06A-10-6S or equiv. (AA111)

MECHANICAL SPECIFICATIONS

Characteristic	Measure
Media	All fluid and gases compatible with 316 stainless steel
Overload-safe	1500 psi
Pressure port	1/8-27NPT female (2)
Dead volume	0.4 cu. in
Wetted parts material	316 stainless steel
Weight	1.9 kg [4.2 lb]
Case material	Stainless steel

OPTIONS CODE

	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see http://sensing.honeywell.com/TMsensor-ship for updated listings.	
Pressure ranges (psid)	0.5, 1, 2, 5, 10, 15, 25, 30	
Temperature compensation	1b. 30 °F to 130 °F 1a. 60 °F to 160 °F 1d. -20 °F to 130 °F 1c. 0 °F to 185 °F 1j. 0 °C to 50 °C	
Internal amplifiers	2u. Unamplified, mV/V output 2b. 4 wire ±5 Vdc 2c. 0 Vdc to 5 Vdc 2j. 4 mA to 20 mA (three-wire) output	2k. 4 mA to 20 mA (two-wire) output ¹¹ 2n. (2N) 4 mA to 20 mA (two-wire) intrinsically safe ¹¹ 2t. 0 Vdc to 10 Vdc
Internal amp enhance - ments	3a. Input/output isolation ⁸ 3d. Remote buffered shunt calibration	
Pressure ports ⁵	5h. 1/8-27NPT female (2) 5a. 1/4-18 NPT female 5c. 7/16-20UNF female	
Electrical termination	6a. Bendix PTIH-10-6P (or equiv.) 6 pin (max. 120 °C) 6e. Integral cable: Teflon (-54 °C to 245 °C) 6f. Integral cable: PVC (-30 °C to 70 °C) 6g. Integral cable: Neoprene (-20 °C to 80 °C) ¹ 6h. Integral cable: Silicone (-54 °C to 150 °C)	6i. Integral underwater cable (8m [26 ft])(max. 80°C) ¹ 6j. 1/2-14 conduit fitting with 1.5 m [5 ft] of 4 conductor PVC cable 6m. DIN 43650 6q. Molded integral cable: Polyurethane ¹ 6t. Integral cable with heyco spring strain relief (1.6 m [5.2 ft])
Shunt calibration	8a. Precision internal resistor ⁶	
Special calibration	9a. 10 point (5 up/5 down) 20% increments @ 20 °C [68 °F] 9b. 20 point (10 up/10 down) 10% increments @ 20 °C [68 °F]	
Wetted diaphragm	10a. 316 stainless steel	
Bridge type	11a. Square bridge ⁶ 11b. Symmetrical bridge ⁶ 11c. Square & symmetrical bridge ⁶	
Zero and span adjustment	14b. Top access to pots ⁷ 14a. No access to pots	
Increased line pressure	25a. 2000 psi line pressure 25b. 3000 psi line pressure 25c. 5000 psi line pressure ¹	
Interfaces	53e. Signature calibration ⁶ 53t. TEDS IEEE 1451.4 module ⁹	



PRODUCT INFORMATION

INTERNAL AMPLIFIERS


Amplifier specifications	Voltage output: Option 2b	Voltage output: Option 2c	Voltage output: Option 2T	Current three-wire: Option 2j	Current two-wire: Option 2k	Intrinsically safe amp: Option 2n (2N)***
Output signal	±5 V	0 V to 5 V or ±5 V @ 5 mA	0 V to 10 V or ±10 V @ 5 mA	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA
Input power (voltage)	±15 V or 26 Vdc to 32 Vdc	11 Vdc to 28 Vdc	15 Vdc to 28 Vdc	22 Vdc to 32 Vdc	9 Vdc to 32 Vdc	9 Vdc to 28 Vdc
Input power (current)	45 mA	40 mA	40 mA	65 mA	4 mA to 28 mA	4 mA to 24 mA
Freq. response (amp)	3000 Hz	3000 Hz	3000 Hz	2500 Hz	300 Hz	2000 Hz
Power supply rejection	60 db	60 db	60 db	60 db	60 db	60 db
Operating temperature	-20 °F to 185 °F	-20 °F to 185 °F	-20 °F to 185 °F	0 °F to 185 °F	0 °F to 185 °F	-20 °F to 185 °F
Reverse voltage protection	Yes	Yes	Yes	Yes	Yes	Yes
Short circuit protection	Momentary	Momentary	Momentary	Yes	Yes	Yes
Wiring code: connector(std) ²	A (+) Supply B Output common C Supply return D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return ** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B No connection C No connection D (+) Output E Case ground F No connection	A (+) Supply B No connection C No connection D (+) Output E Case ground F No connection
Wiring code: cable ^{2,3,4}	R (+) Supply BI Output common G Supply return W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply BI Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply BI Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply BI Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply BI (+) Output W Case ground	R (+) Supply BI (+) Output W Case ground

* Black and green wires are internally connected.


** Pins B and C are internally connected.

***See Honeywell's Web site for the most up-to-date information regarding Intrinsically safe approvals, ref #008-0547-00.

TYPICAL SYSTEM DIAGRAM

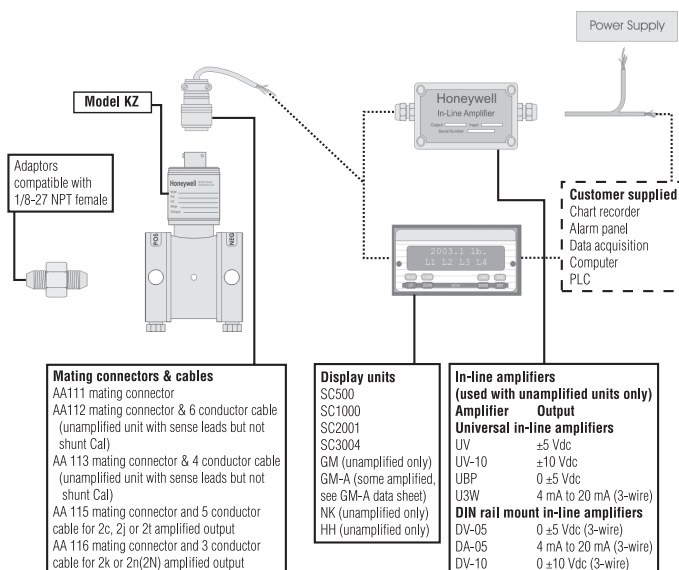

MOUNTING DIMENSIONS

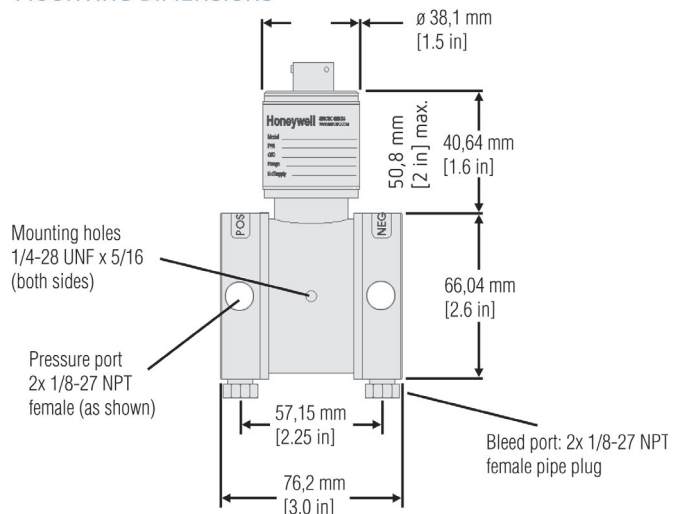



PRODUCT INFORMATION

RANGE CODES

Range Code	Available ranges
AN	±0.5 psid
AP	±1 psid
AR	±2 psid
AT	±5 psid
AV	±10 psid
BJ	±15 psid
BL	±25 psid
BM	±30 psid

WIRING CODES

Connector	Unamplified
A, B	(+) excitation
C, D	(-) excitation
E	(-) output
F	(+) output

NOTES

1. Availability varies according to range.
2. Interconnecting shunt cal. 1 terminal with shunt cal. 2 terminal provides 50% (unamplified units), 75% (4 mA to 20 mA 3-wire units) or 80% (voltage amplified units of full scale output for quick calibration. Shunt calibration comes standard with internal amplifier options 2b, 2c, 2t and 2j.
3. O=Orange, Y=Yellow, B=Blue, Bl=Black, R=Red, Br=Brown, W=White, G=Green. Color specifying cable and number or letter specifying connector.
4. No mating connector necessary for cable option.
5. Some pressure port options may require axial orientation.
6. Only available with unamplified option 2u.
7. Only available with amplified options.
8. Only available with Vdc output options 2b, 2c.
9. Consult factory for TEDS availability with amplified models.
10. Termination dependent; consult factory.
11. 5000 ohm bridge required.

**Option: also available, equivalent inches of water column, inches of HG column, mBar or kPa for pressure ranges

Note: Unless otherwise specified on order, amplified units with 4 mA to 20 mA output will provide 4 mA at 0 psid and 20 mA at positive full scale and the unit will not operate in the negative direction. An available is to specify 4 mA at negative full scale and 20 mA at positive full scale. All amps add 2 in to housing.