



bar **MPM426WS**
Deep-water Level & Temperature Transmitter

MPM426WS Deep-water Level&Temperature Transmitter is a full welded, full sealed and submersible diffusion silicon instrument for level and temperature measurement. It uses a high stable and reliable piezo-resistive OEM pressure sensor and a PT1000 temperature sensor with a high-performance signal processing circuit mounted in stainless steel housing. Meanwhile, the product adopts double-way sealing with special rubber rings and the sealing and locking line are separated in order to improve the sealing degree. The cavity (the terminal is in it) is filled with highvacuum water-resistance and mineral oil-resistance sealing silicone so that the leading-out terminal can be fully sealed and insulated. It is especially suitable for measurement of oil and gas in deep well. The advanced production technology and automated production line ensure the stability of products, and good adaptation makes your device able to copy with various complex environments.



MICROSENSOR
AUTHORIZED DISTRIBUTOR

FEATURES

- Level and temperature double output signal
- Reversed-polarity protection
- Suitable for deep-water level and temperature measurement
- IP68 protection
- Automatic production line for quality guarantee, stable and reliable

SPECIFICATION

Span(FS)	350, 500, 1000, 1500, 2000mH ₂ O; -20°C ...0°C ~10°C ...80°C
Overpressure	1.5 times FS
Accuracy	±0.5%FS (pressure); ±2°C (temperature)
Stability	±0.2%FS/year
Zero Drift	±0.02 %FS/°C
Span Drift	±0.05 %FS/°C
Operation Temp.-	20°C ~80°C
Storage Temp.	-40°C ~100 °C
Transmission Type	3-wire (pressure and temperature output signal)
Power Supply1	2V~30VDC
Output Signal	4mA~20mADC (pressure); 4mA~20mADC (temperature)
Load	<(U-12V)/0.02A(Ω)




CONSTRUCTION MATERIAL

Housing: Stainless steel 1Cr18Ni9Ti
Sealed ring: Viton
Cable: \varnothing 7.2mm polyethylene or polyurethane cables
Diaphragm: Stainless steel 316L


ELECTRICAL CONNECTION

The transmitter is connected with cable through sintered parts.



Pin	Wire Color	Electrical Definition
1	Black	V+
2	Red	Pressure Output
3	Blue	Temperature Output

OUTLINE CONSTRUCTION (Unit: mm)

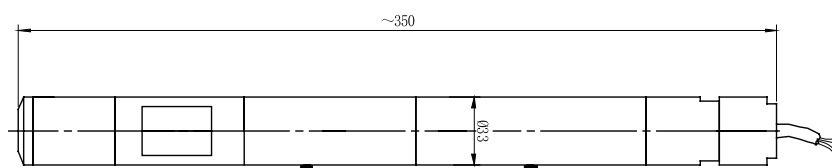

ORDER GUIDE

MPM426WS		Deep-water Level&Temperature Transmitter			
Range	350, 500, 1000, 1500, 2000m H ₂ O				
	-20°C...0°C ~ 10°C...80°C				
[0~XmH ₂ O] [0~T°C]L	X: actual measured pressure T: actual measured temp. L: cable length(optional)				
Code	Output Signal				
E	4mA~20mA DC				
Code	Construction Material				
	Diaphragm	Pressure Port	Housing		
	22	S.S. 316L	S.S.	S.S.	
25	Tantalum	S.S.	S.S.		
Code	Others				
Y _a	Aluminum connection box with display				
Y _c	MS200 water-proof connection box (suggested)				
Y _d	PD140 lightning-proof protection device				
MPM426WS	[0~350mH ₂ O]	[0~60°C]	360 E	22	Y _c the whole spec.

NOTES

- Please be sure the measured media is compatible with contacting material; please also note the media density in the measurement (except water);
- We provide two kinds of cables --PVC and polyurethane for option, charged based on materials and length.
- If the product is installed in "lightning and thunder" area, we suggest to use lightning-proof protectiondevice to protect transmitter. Please be sure goodgrounding as well;
- Under standard conditions 1mH₂O (4°C , g=9.80665 m/s²), the corresponding relationship between 1mH₂O and pressure is showed as follows: 1mH₂O = 0.1kgf/cm² = 9.80665kPa;
- If the user has special requirement, please feel free to contact our company.