



## MMS

### Contactless Magnetostrictive Position Sensor

#### FEATURES


- Measuring range 50 - 5000 mm
- 16 bit resolution
- 0...10 V, 0...20 mA, 4...20 mA
- 10...0 V, 20...0 mA, 20...4 mA output
- 24 VDC supply



#### TECHNICAL SPECIFICATIONS


Measurement stroke	50 to 5000 mm
Resolution	16 bit DAC output
Repeatability	±0,005% (full scale)
Output	0 ... 10 V , 10 ... 0 V , 4 ... 20 mA , 0 ... 20 mA , 20 ... 4 mA , 20 ... 0 mA
Power supply	24 VDC ±10%
Displacement speed	< 10 m/s
Update time	(0-600mm, 0,5ms), (600-1500mm, 1ms), (1500-3000mm, 2ms), (1501-5000mm, 3ms)
Load Resistance	RLoad max = 500 Ohm, for current output
Max. consumption	50 mA - 90 mA (depending on stroke length)
Max. output noise	< 5 mVpp
Linearity	±0,05% full scale (min. 100 µm)
Reverse polarity protection	Yes, Up to (-30 VDC)
Overvoltage protection	Yes, Up to (30 VDC)
Vibration	EN 60068-2-6 , 5-200 Hz 200 m/s <sup>2</sup> (20g) , 2h 30min each axis (x,y,z)
Case dimensions	33 mm x 33 mm
Case material	Anodized aluminium
Mechanical fixing	Variable brackets
Protection level	IP 65 - EN 60529
Operating temperature	-10°C ... +70 °C
Storage temperature	-30°C ... +90 °C

#### TECHNICAL SPECIFICATIONS

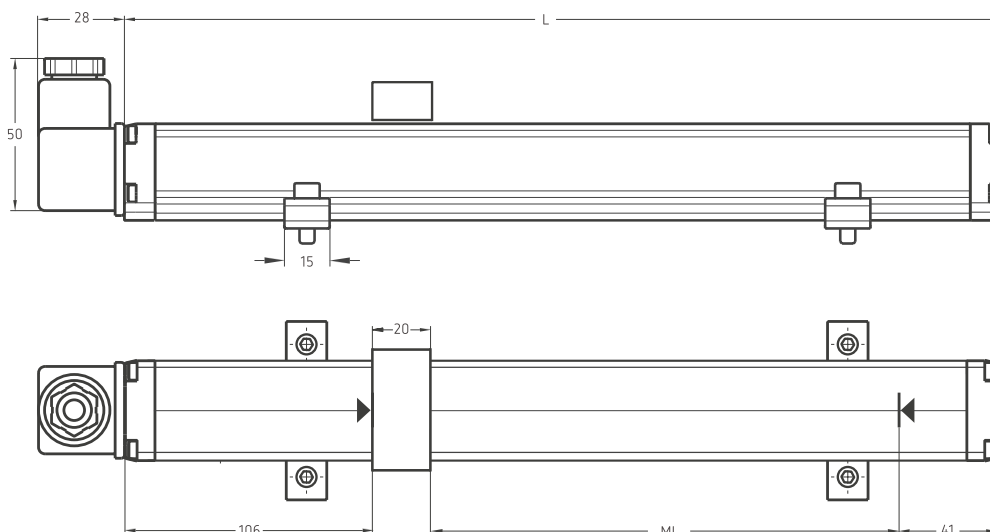




## TECHNICAL SPECIFICATIONS

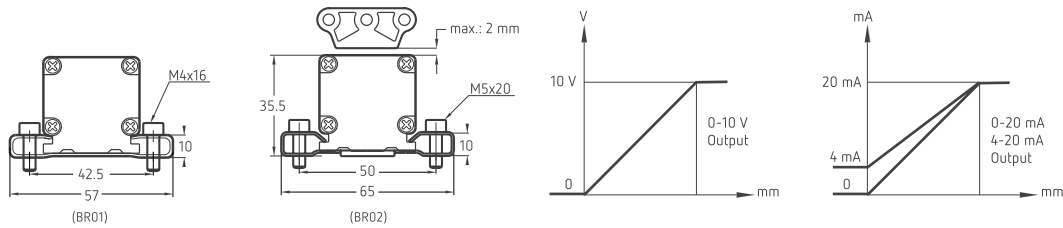


MSS (mm)	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	1000	1100	1200	1300	1400	1500	1750	2000	2250	2500	3000	4000	5000
ML (Measuring Length)	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	890	900	1000	1100	1200	1340	1400	1500	1750	2000	2250	2500	3000	4000	5000
L (Total Length)	197	247	297	347	397	447	497	547	597	647	697	747	797	847	897	947	997	1047	1147	1247	1347	1447	1547	1647	1897	2147	2471	2721	3221	4241	5261

For 106/41 mm dead zone calculation


## ROUND CONNECTOR

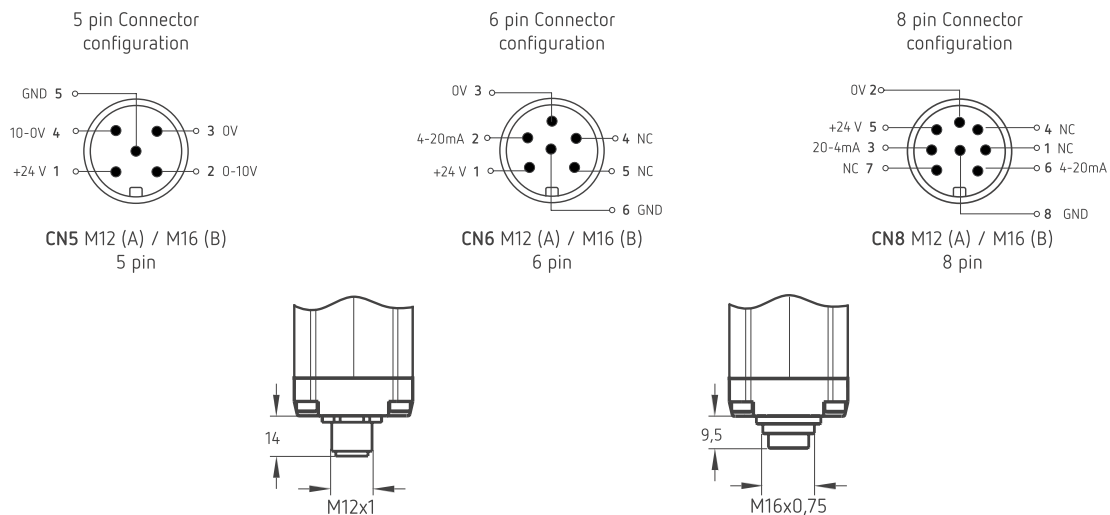

## HYDRAULIC TYPE CONNECTOR

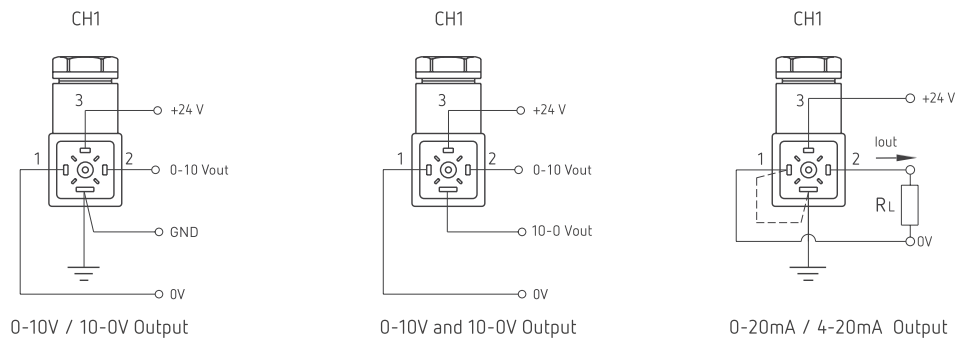


## CABLE



Voltage Output	Current Output	Cable Length
+V : Brown	+V : Brown	1M:1meter (standard)
0V : Blue	0V : Blue	(Other cable lengths available)
0V sense: Black	0V sense: Black	
Output 1 : White (0-10V)	Output 1 : White (4-20mA)	
Output 2 : Orange (10-0V)	Output 2 : Orange (20-4mA)	
Earth : Shield	Earth : Shield	



## CURSOR

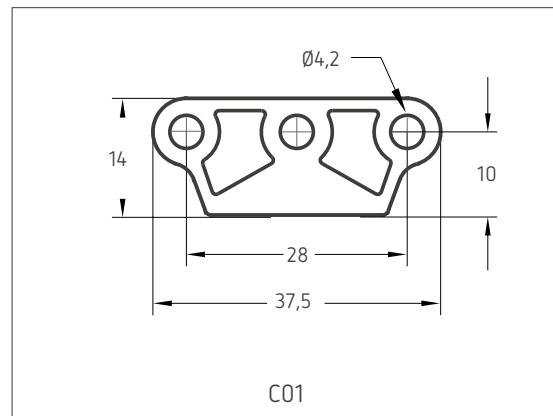

## ORDERING PROCEDURE

Model	Measuring Range	Resolution	Cursor	Output	Connector / Cable	Bracket	Dead Zone
MSS	300	A	C01	V10	CH1	BR02	106/41
MSS	50 ... 5000mm	A: 16 bit B: 12 bit	1C01: 1 cursor 2C01: 2 cursors	V10 :0-10V I40 :4-20mA V01 :10-0V I04 :20-4mA V11 :0-10V/10-0V I41 :4-20mA/20-4mA V50 :0-5V I20 :0-20mA V05 :5-0V I02 :20-0mA V51 :0-5V/5-0V I21 :0-20mA/20-0mA	CH1 : Hydraulic type CN5A : M12 CN5B : M16 CN6A : M12 CN6B : M16 CN8A : M12 CN8B : M16  1M : 1 meter 2M5 : 2,5 meters	BR01 BR02	≤ 2000 mm MSS:106/41 > 2000-3000 mm MSS:180/41 > 3000-4000 mm MSS:200/41 > 4000-5000 mm MSS:220/41