



P133 MID Stroke Linear Position Sensor

Position feedback for industrial and scientific applications

FEATURES

- Non-contacting inductive technology to eliminate wear
- Angle set to customer's requirement
- Compact, durable and reliable
- High accuracy and stability
- Sealing to IP65/IP67 as required

Our P133 LIPS® (Linear Inductive Position Sensor) is an affordable, durable, accurate position sensor designed for a wide range of industrial applications.

It is particularly suitable for OEMs seeking good sensor performance in situations where a short-bodied sensor is needed and cost is important. The unit is compact and space-efficient, being responsive along almost its entire length, and like all sensors provides a linear output proportional to travel. Each unit is supplied with the output calibrated to the travel required by the customer, from 51 to 100mm and with full EMC protection built in.

Overall performance, repeatability and stability are outstanding over a wide temperature range. The sensor has a rugged stainless steel body and plunger. It is easy to install and set up, mounting options include flange and body clamps. The plunger can be supplied free or captive, with female M4 thread, or spring-loaded with a ball end. The P133 also offers a wide range of mechanical and electrical options, environmental sealing is to IP65 or IP67 depending on selected cable or connector options.



P133-17d

SPECIFICATION

Dimensions

Body diameter	35 mm	
Body Length:	Dependant on calibrated travel & mounting option	
Calibrated Travel	Standard	Flange mounted
51 mm to 70 mm	125 mm	141.3 mm
71 mm to 100 mm	155 mm	171.3 mm
Plunger	Ø 6mm	
For full mechanical details see drawing P133-11		

Power Supply	+5V dc nom. $\pm 0.5V$, 10mA typ 20mA max
Output Signal	0.5-4.5V dc ratiometric, Load: 5k Ω min.
Independent Linearity	$\leq \pm 0.25\%$ FSO @ 20°C $\leq \pm 0.1\%$ FSO @ 20°C available upon request.

Temperature Coefficients	< $\pm 0.01\%$ /°C Gain & < $\pm 0.01\%$ FS/°C Offset
--------------------------	--

Frequency Response	> 10 kHz (-3dB) > 300 Hz (-3dB) 2 wire 4 to 20 mA
--------------------	--

Resolution	Infinite
------------	----------

Noise	< 0.02% FSO
-------	-------------

Environmental Temperature Limits

Operating	-40°C to +125°C standard -20°C to +85°C buffered
Storage	-40°C to +125°C

Sealing	IP65/IP67 depending on connector / cable option
EMC Performance	EN 61000-6-2, EN 61000-6-3
Vibration	IEC 68-2-6: 10 g
Shock	IEC 68-2-29: 40 g
MTBF	350,000 hrs 40°C Gr

Drawing List	
P133-11	Sensor Outline
Drawings, in AutoCAD® dwg or dxf format, available on request.	

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.



HowPositek's PIPS® technology eliminates wear for longer life

PIPS®-based displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT.

PIPS® technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A PIPS® sensor, based on simple inductive coils using ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life.

PIPS® overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials. It requires no separate signal conditioning.

Our LIPS® range are linear sensors, while RIPS® are rotary units and TIPS® are for detecting tilt position. Ask us for a full technical explanation of PIPS® technology.

We also offer a range of ATEX-qualified intrinsically-safe sensors.

TABLE OF OPTIONS

CALIBRATED TRAVEL: Factory set to any length from 0-51mm to 0-100mm (e.g. 76mm).

ELECTRICAL INTERFACE OPTIONS

OUTPUT SIGNAL	SUPPLY INPUT	OUTPUT LOAD
Standard: 0.5-4.5V dc ratiometric	+5 V dc nom. \pm 0.5V.	5k Ω min.
Buffered: 0.5-4.5V dc	+ 24V dc nom. + 9-28V.	5k Ω min.
\pm 5V dc	\pm 15V dc nom. \pm 9-28V.	5k Ω min.
0.5-9.5V dc	+ 24V dc nom. + 13-28V.	5k Ω min.
\pm 10V dc	\pm 15 V dc nom. \pm 13.5-28V.	5k Ω min.
Supply Current	10mA typical, 20mA maximum.	
4-20mA (2 wire)	+ 24 V dc nom. + 18-28V.	300 Ω @ 24V.
(3 wire sink)	+ 24 V dc nom. + 13-28V.	950 Ω @ 24V.
(3 wire source)	+ 24 V dc nom. + 13-28V.	300 Ω max.

Sensors supplied with access to output 'zero' and 'span' calibration adjustments as standard. No access option available.



CONNECTOR/CABLE OPTIONS

Connector - Hirschmann GD series IP65
Cable with M12 gland or short gland IP67
Cable length >5.0 cm – please specify length in cm

MOUNTING OPTIONS

Flange, Body Tube Clamp.

PUSH ROD OPTIONS – standard retained with M4x0.7 female thread
Sprung loaded (spring supplied loose), Dome end (sprung loaded) or Free.

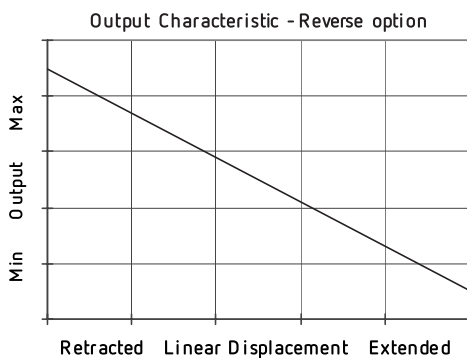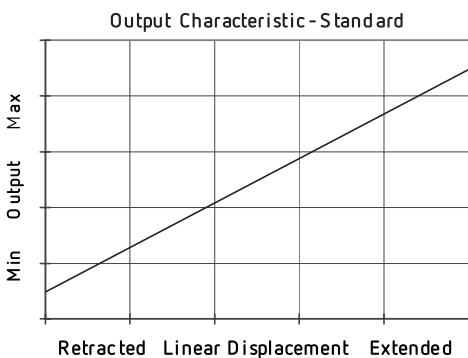



HOW TO ORDER

	a	b	c	d	e	f	g	h	j	k
P133 .	Displacement	Output	Adjustments	Connections	Option	Option	Option	Option	Option	Z-code


a Displacement (mm)		Value
Displacement in mm	e.g. 0 - 66 mm	66
b Output		
Supply V dc V _s (tolerance)	Output	Code
+5V (4.5 - 5.5V)	0.5 - 4.5V (ratiometric with supply)	A
±15V nom. (±9 - 28V)	±5V	B
+24V nom. (13 - 28V)	0.5 - 9.5V	C
±15V nom. (±13.5 - 28V)	±10V	D
+24V nom. (18 - 28V)	4 - 20mA 2 wire	E
+24V nom. (13 - 28V)	4 - 20mA 3 wire Sink	F
+24V nom. (9 - 28V)	0.5 - 4.5V	G
+24V nom. (13 - 28V)	4 - 20mA 3 wire Source	H
c Calibration Adjustments		Code
Accessible - default		blank
Sealed		Y
d Connections Cable* or Connector		Code
Connector	IP65 DIN 43650 'C'	J
Cable Gland	IP67 M12	Lxx
Cable Gland	IP67 Short	Mxx
*Supplied with 50 cm as standard, specify required cable length specified in cm. e.g. L2000 specifies cable gland with 20 metres of cable. Nb: restricted cable pull strength.		
e Housing		Code
Standard - default		blank
Flange Mount		N
f Body Fittings		Code
None - default		blank
Body Clamps - 1 pair		P
g Sprung Plunger		Code
None - default		blank
Spring Extend	Captive plunger only.	R
h Plunger Fittings		Code
None - default	Female Thread M4x0.7x7 deep	blank
Dome end	Required for option 'R'	T
j Plunger Options		Code
Captive - default	Plunger is retained	blank
Non-captive	Plunger can depart body	V

k Z-code	Code
Connector IP67 M12 IEC 60947-5-2 must have options 'Y' & 'J'	Z600
Connector IP67 M12 IEC 60947-5-2 must have option 'J'	Z601
≤± 0.1% @20°C Independent Linearity displacement between 10mm & 50mm only!	Z650
Connector with cable option 'J' with length required in cm i.e. J100 specifies connector with 100cm of cable.	Z999

INSTALLATION INFORMATION

Output Option	Output Description:	Supply Voltage: V_s (tolerance)	Load resistance: (include leads for 4 to 20mA O/Ps)
A	0.5 - 4.5V (ratiometric with supply)	+5V (4.5 - 5.5V)	$\geq 5k\Omega$
B	$\pm 5V$	$\pm 15V$ nom. ($\pm 9 - 28V$)	$\geq 5k\Omega$
C	0.5 - 9.5V	+24V nom. (13 - 28V)	$\geq 5k\Omega$
D	$\pm 10V$	$\pm 15V$ nom. ($\pm 3.5 - 28V$)	$\geq 5k\Omega$
E	4 - 20mA 2 wire Current Loop	+24V nom. (18 - 28V)	$\approx 0 - 300\Omega$ max. @ 24V ~ 1.2 to 6V across 300Ω $\{R_L \text{ max.} = (V_s - 18) / 20^{-3}\}$
F	4 - 20mA 3 wire Sink	+24V nom. (13 - 28V)	$\approx 0 - 950\Omega$ max. @ 24V ~ 3.8 to 19V across 950Ω $\{R_L \text{ max.} = (V_s - 5) / 20^{-3}\}$
G	0.5 - 4.5V	+24V nom. (9 - 28V)	$\geq 5k\Omega$
H	4 - 20mA 3 wire Source	+24V nom. (13 - 28V)	$\approx 0 - 300\Omega$ max. ~ 1.2 to 6V across 300Ω

Not all output options available - see product datasheet for full options list

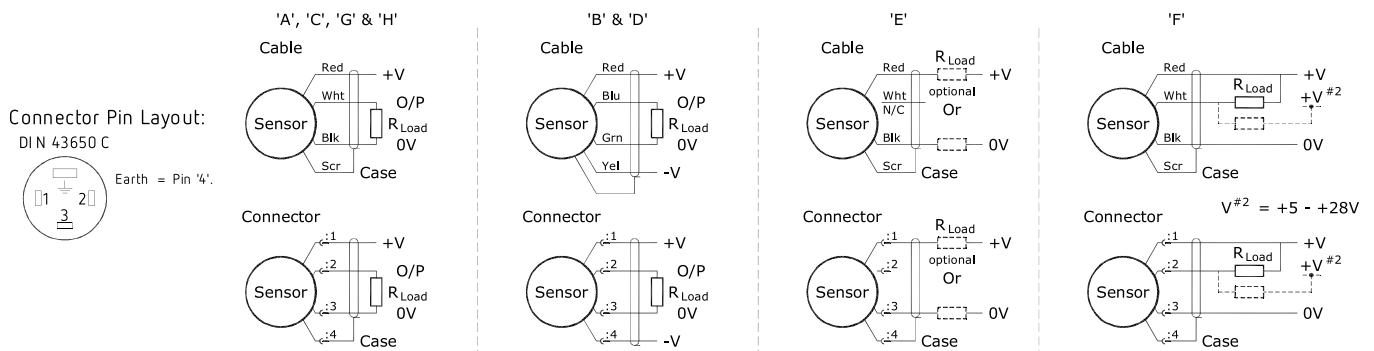

Gain and Offset Adjustment: (Where accessible - Typically $\pm 10\%$ Min available) To adjust the gain or offset use a small potentiometer adjuster or screwdriver 2mm across. Do not apply too much force on the potentiometers.

Mechanical Mounting: Flange mounted or by clamping the sensor body - body clamps are available, if not already ordered. The flange slots are 4.5 mm by 30 degrees wide on a 48 mm pitch.

Output Characteristic: Plunger extended, at start of normal travel, from mounting face by:

Standard body : 42.5 mm*



Flanged body : 28 mm*

*Note: where ball end option is fitted add 5 mm.

The output increases as the plunger extends from the sensor body, the calibrated stroke is between 51 mm and 100 mm.







Incorrect Connection Protection levels:

- A Not protected – the sensor is not protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.
- B & D Supply leads diode protected. Output must not be taken outside $\pm 12V$.
- C & G Supply leads diode protected. Output must not be taken outside 0 to 12V.
- E, F & H Protected against any misconnection within the rated voltage.

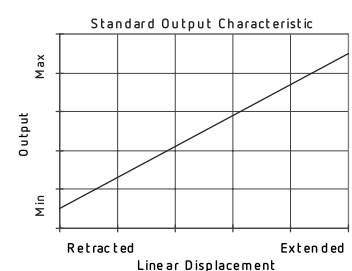


ELECTRICAL OPTIONS / SPECIFICATIONS

A	FIRST ISSUE - RAN1063	P DM
B	RANGE NOTE AMENDED - RAN1200	P DM

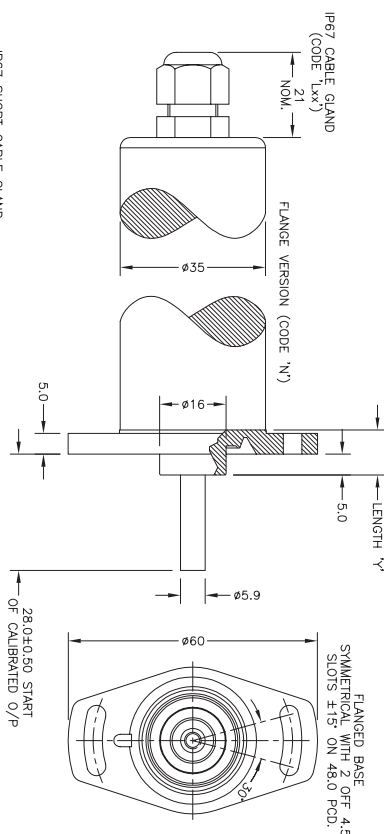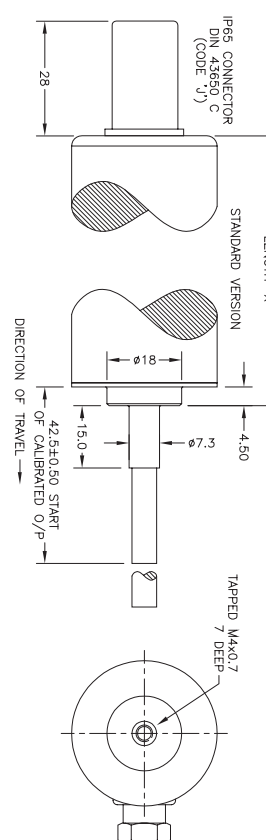

NOTE: SENSORS ARE MADE IN FOUR STANDARD LENGTHS.			
TRAVEL: (mm)		BODY LENGTH: (mm)	
CALIBRATED	MECHANICAL	X ¹	Y ² FLANGE
0-51	0-70	70	125.0
0-71	TO 0-100	100	155.0
			171.3





THE PLUNGER RETRACTS 5mm FROM START OF CALIBRATED TRAVEL (2mm FOR SPRUNG VERSIONS) AND EXTENDS 9.5mm* BEYOND END OF MECHANICAL TRAVEL. *DOES NOT INCLUDE DIFFERENCE BETWEEN CALIBRATED AND MECHANICAL TRAVEL. DIMENSIONS ARE NOMINAL.

DRAWINGS NO. TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE
CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED
BY THE AUTHORISED PERSON
THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.

ELECTRICAL OPTIONS / SPECIFICATIONS	
OUTPUT	SUPPLY
0.5 TO 4.5V RATIOMETRIC	5V
±5V	±1.5V
0.5 TO 9.5V	24V
±10V	±1.5V
0.5 TO 4.5V	24V
SUPPLY CURRENT 12mA TYP.	20mA MAX.
4 TO 20mA 2-WIRE	24V
4 TO 20mA 3-WIRE SINK	24V
4 TO 20mA 3-WIRE SOURCE	24V
SINK VERSION OUTPUT COMPLIANCE 5-28V	

SOURCE VERSION 3RVE 3000 MAX TO SUPPLY
CABLE: 0.2mm², O/A SCREEN, PUR JACKET - SUPPLIED
WITH 50cm OR REQUIRED LENGTH IN cm. e.g. 1.50
2. CORE: JACKET 4mm
3. CORE: JACKET 4mm
CABLE/CONNECTOR* CONNECTIONS:
3 CORE 4 CORE CONNECTOR
RED RED : 1
BLACK YELLOW : +ve
RED GREEN : -ve
WHITE BLUE : 4
GREEN BLUE : 2
SCREEN SCREEN : 1
BODY - OPTIONS: A, C, E-H
*CONNECTORS: MAXIMUM CONDUCTOR CROSS SECTION 0.75mm²
RANGE OF DISPLACEMENT FROM 0-51mm TO 0-100mm e.g.76,
IN INCHMENTS OF 1mm.
BODY MATERIAL: STAINLESS STEEL
FLANGE MATERIAL: ALUMINIUM (CODE 'N')
FURTHER OPTIONS:
SINGLE PAIR OF BODY CLAMPS (CODE 'P')
SPRING PLUNGER, TO EXTENDED POSITION (CODE 'R')
DOME END (CODE 'R')** IN CONJUNCTION WITH SPRUNG
PLUNGER (CODE 'R')**
PLUNGER FREE (CODE 'V')
*B. NOT AVAILABLE WITH SPRUNG OPTIONS.



<div style="display: flex; justify-content: space-between;"> <div> <p>SCALE</p> <p>10mm</p>  </div> <div> <p>DRAWING NUMBER</p> <p>P 133-11</p> </div> <div> <p>REV</p> <p>B</p> </div> </div>	<p>SHEET</p> <p>1 of 1</p>
<div style="display: flex; justify-content: space-between;"> <div> <p>DESCRIPTION</p> <p>P133 II P.S. MID 5 TROKE</p> <p>LINEAR POSITION SENSOR</p> </div> <div> <p>CHECKED BY X</p> <p>DATE X</p> <p>DATE X</p> <p>DATE X</p> <p>DATE X</p> </div> </div>	<p>RDS</p> <p>DIMS mm</p>
<p>A 10/17/15</p>	<p>B 29/08/17</p>