



## **RTM**

## Features


- Measuring range 50 600 mm
- Long mechanical life 100 million cycles
- Excellent repeatability < 0.01 mm
- Infinite resolution
- 5 KOhm or 10 KOhm



## Technical Specifications

Measurement stroke	50 to 600 mm	
Linearity	±%0,05 (>200mm), ±%0,1 (130-200mm), ±%0,2 (75-130mm), ±%0,5 (<75mm)	
Repeatability	< 0,01 mm	
Resolution	Infinite	
Resistance	5 KOhm or 10 KOhm	
Resistance tolerance	±%20	
Load resistance	100 KOhm min.	
Recommended cursor current	<1 μΑ	
Permissible applied voltage	28VDC max.	

Electrical connections	4 pin connector, Cable (optional)		
Displacement speed	<5 m/s		
Mechanical life	100 million cycles		
Case dimensions	33mmx33 mm		
Case material	Anodized aluminium		
Rod diameter	Ø6 mm		
Rod material	Stainless steel		
Mechanical fixing	Ball joints on the both side		
IP degree	IP 65		
Operating temperature	-20°C +80°C		
Storage temperature	-30°C +90°C		

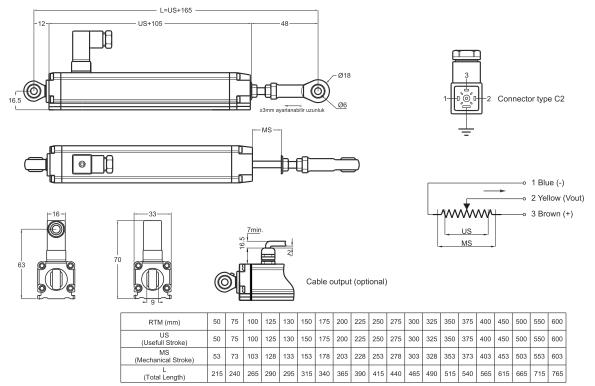

Model	Measurement stroke (mm)	Linearity (%)	Resistance (KOhm)	Connector / Cable
(example) RTM	500	D	5K	C2
RTM	50 600mm	D: ± %0,05 (>200mm) ± %0,1 (130-200mm) ± %0,2 (75-130mm) ± %0,5 (<75mm)	5K: 5 KOhm 10K: 10 KOhm	C2 : 4 pin connector 1M : 1 meter cable 2M5 : 2,5 meter cable

Page 1/1

The information provided herein is to the best of our knowledge true and accurate, it is provided for guidance only. All specifications are subject to change without prior notification.