

AUTHORIZED DISTRIBUTOR

# MODEL 64B CRASH TEST ACCELEROMETER **SPECIFICATIONS**

- Advance Piezoresistive MEMS Sensor
- **Next Generation Piezoresistive MEMS Sensor**
- ±50g to ±6000g Ranges
- Compliant to SAE-J211/J2570
- **Compliant to ISO-6487**
- **High Over Range Protection**

The TE Connectivity model 64B is an exceptional piezoresistive MEMS accelerometer designed for both crush zone and anthropomorphic dummy instrumentation. The accelerometer features a full bridge output configuration with ideal gas damping tailored for outstanding shock survivability and a flat frequency response to >8kHz. The model 64B accelerometer has a standard cross-talk accuracy of <3% (with option for <1%), a standard ZMO of <±25mV and a linearity accuracy specification of  $<\pm 1.0\%$ .

The model 64B crash test accelerometer is offered in ranges from ±50 to ±6000g and has a standard operating temperature range of -40°C to +121°C. The sensor is fully encapsulated in Stycast for IP65 environmental protection rating. The nominal  $4000\Omega$  bridge impedance limits current draw resulting in quick warm-up time and minimal drift, unlike lower impedance designs on the market which are subject to much longer warm-up time due to gage heating effects.

TE Connectivity also supplies the calibration data in a user friendly excel format which enables high volume users to quickly upload the calibration information for each sensor installed.



(F

## **APPLICATIONS**

- Anthropomorphic Dummy Instrumentation
- Crush Zone Testing •
- Auto Safety Testing Applications
- Shock and Impact Testing
- **Transient Drop Testing**

## **FEATURES**

- 1% Transverse Sensitivity Option
- Wide bandwidth to >8kHz
- Standard <25mV ZMO
- Linearity <1%
- 10,000g Shock Protection
- 2-10Vdc Excitation
- **IP65** Environmentally Sealed
- **Optimum Gas Damping**
- Quick Warm-up Time

ALTHEN **SENSORS & CONTROLS** 

SENSOR SOLUTIONS /// Model 64B Accelerometer Germany/Austria/Switzerland Benelux info@althen.de

France

07/2019

Sweden

USA/Canada

#### PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. TE Connectivity reserves the right to update and change these specifications without notice.


PARAMETERS								
DYNAMIC							NOTES	
Range (g)	±50	±100	±200	±500	±2000	±6000		
Sensitivity (mV/g)1	1.2-3.0	0.6-1.2	0.6-1.2	0.3-0.6	0.12-0.3	0.05-0.12	@10Vdc Excitation	
Frequency Response (Hz)	0-1000 0-1400	0-1200 0-1600	0-1400 0-1900	0-2000 0-2800	0-6000 0-8000	0-6000 0-8000	±5% ±1dB	
Natural Frequency (Hz)	4000	6000	8000	11000	28000	28000		
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1% on 'T' Option	
Non-Linearity (% of reading)	±1	±1	±1	±1	±1	±1		
Damping Ratio	0.5	0.5	0.5	0.3	0.15	0.15		
Shock Limit (g)	10000	10000	10000	10000	10000	10000		
ELECTRICAL								
Zero Acceleration Output (m	V) <±25	<±25						
Excitation Voltage (Vdc)	2 to 10	2 to 10						
Input Resistance (Ω)	3500-4500	3500-4500						
Output Resistance (Ω)	3500-4500	3500-4500						
Insulation Resistance (MΩ)	>100	>100						
Residual Noise (µV RMS)	/ RMS) <10							
Ground Isolation	Isolated fro	Isolated from mounting surface						
Warm-up Time	<30 secon	<30 seconds						
ENVIRONMENTAL								
Thermal Zero Shift (%FSO/°	C) ±0.04	±0.04						
Thermal Sensitivity Shift (%/	°C) -0.20 ±0.0	-0.20 ±0.05						
Operating Temperature (°C)	-40 to +12	-40 to +121						
Humidity Epox		Epoxy Sealed, IP65						
PHYSICAL								
Case Material Anodized Aluminum, Black								
Cable	4x #32 AW	4x #32 AWG Leads, PFA Insulated, Braided Shield, Polyurethane Jacket						
Weight (grams)	1.0	1.0						
Mounting	2x #0-80 x	2x #0-80 x 1/4" Socket Head Cap Screws						
<sup>1</sup> Output is ratiometric to excita	ation voltage							
Calibration supplied:	CS-FREQ-0100	-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±1/2dB Frequency Limit						
Optional accessories:	MTG-E4 121 140A	1 3-Channel Precision Low Noise DC Amplifier						

 SENSOR SOLUTIONS /// Model 64B Accelerorer
 07/2019
 Page 2


 ALTHEN
 Germany/Austria/Switzerland
 Benelux
 France
 Sweden
 USA/Canada
 Other countries

 SENSORS & CONTROLS
 info@althen.de
 sales@althen.nl
 info@althensensors.fr
 info@althensensors.cs
 info@althensensors.com

#### TYPICAL FREQUENCY RESPONSE

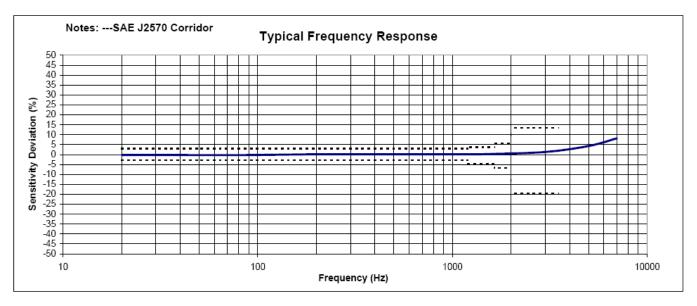

#### SCHEMATIC

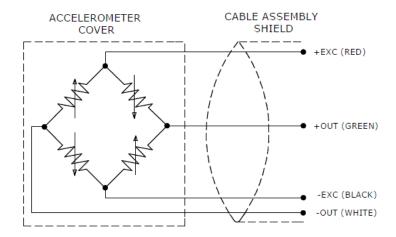


 SENSOR SOLUTIONS /// Model 64B Accelerorer
 07/2019
 Page 3

 ALTHER
 Germany/Austria/Switzerland
 Benelux
 France
 Sweden
 USA/Canada
 Other countries


 SENSORS & CONTROLS
 info@althen.de
 sales@althen.nl
 info@althensensors.fr
 info@althensensors.cs
 info@althensensors.com
 info@althensensors.com

### **DIMENSIONS**

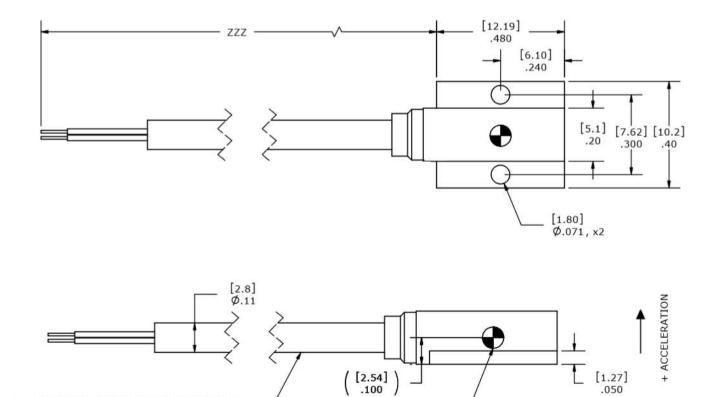

[2.54] .100 4x, #32 AWG CONDUCTORS PFA INSULATED, BRAIDED SHIELD, TPE JACKET CENTER OF SEISMIC MASS

## TRIAXIAL MOUNTING BLOCK

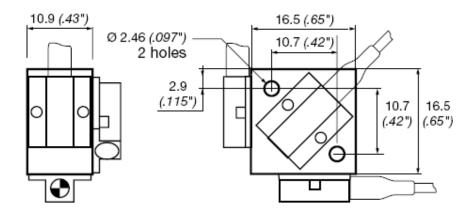

SENSOR SOLUTIONS /// Model 64B Accelerometer 07/2019 Page 4 ALTHEN Germany/Austria/Switzerland Benelux France Sweden USA/Canada Other countries info@althen.de sales@althen.nl info@althensensors.fr info@althensensors.se info@althensensors.com info@althensensors.com SENSORS & CONTROLS

#### **ORDERING INFORMATION**

64B	GGGG	ZZZ	Т	XXX
Range 0050 = 50g 0100 = 100g 0200 = 200g 0500 = 500g 2000 = 2000g 6000 = 6000g				
<b>Cable length</b> 240 = 240 inches, 20ft 300 = 300 inches, 25ft 360 = 360 inches, 30ft				
197 = 197 inches, 5 meters 276 = 276 inches, 7 meters 394 = 394 inches, 10 meters				
<b>Transverse Sensitivity Option</b> Blank = <3% T = <1%				
Excitation Voltage Option Blank = 10Vdc 001 = 5Vdc 005 = 2Vdc				

Example;64B-2000-360 Model 64B, 2000g range, 360inch (30ft) cable length

Example;64B-0500-276T-001

Model 64B, 500g range, 276inch (7m) cable length, <1% transverse sensitivity option, 5V calibration

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

 SENSOR SOLUTIONS /// Model 64B Acceleroreter
 07/2019
 Page 5

 ALTERN SENSOR SOLUTIONS /// Model 64B Acceleroreter
 France
 Sweden
 USA/Canada
 Other countries

 SENSOR S & CONTROLS
 info@althen.de
 sales@althen.nl
 info@althensensors.fr
 info@althensensors.ce
 info@althensensors.ce
 info@althensensors.ce