


CRS03

Angular Rate Sensor

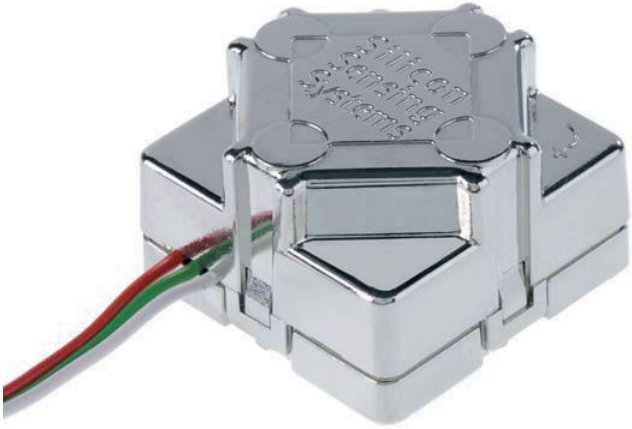

A robust and affordable mass-produced gyroscope for automotive and commercial customers.

Angular rate sensors are used wherever rate of turn sensing is required without a fixed point of reference. The sensor will output a DC voltage proportional to the rate of turn and input voltage.

High performance motion sensing even under severe shock and vibration.

Whatever your application, the unique silicon ring technology, coupled with closed loop electronics, gives advanced and stable performance over time and temperature, overcoming the mount sensitivity problems experienced with simple beam or tuning fork based sensors.

Key Features


- Four model types available
- Excellent performance over temperature
- Repeatable drift characteristic
- High shock and vibration operation
- High reliability
- Metalised housing



© Silicon Sensing is an Atlantic Inertial Systems, Sumitomo Precision Products joint venture company

CRS03

Angular Rate Sensor

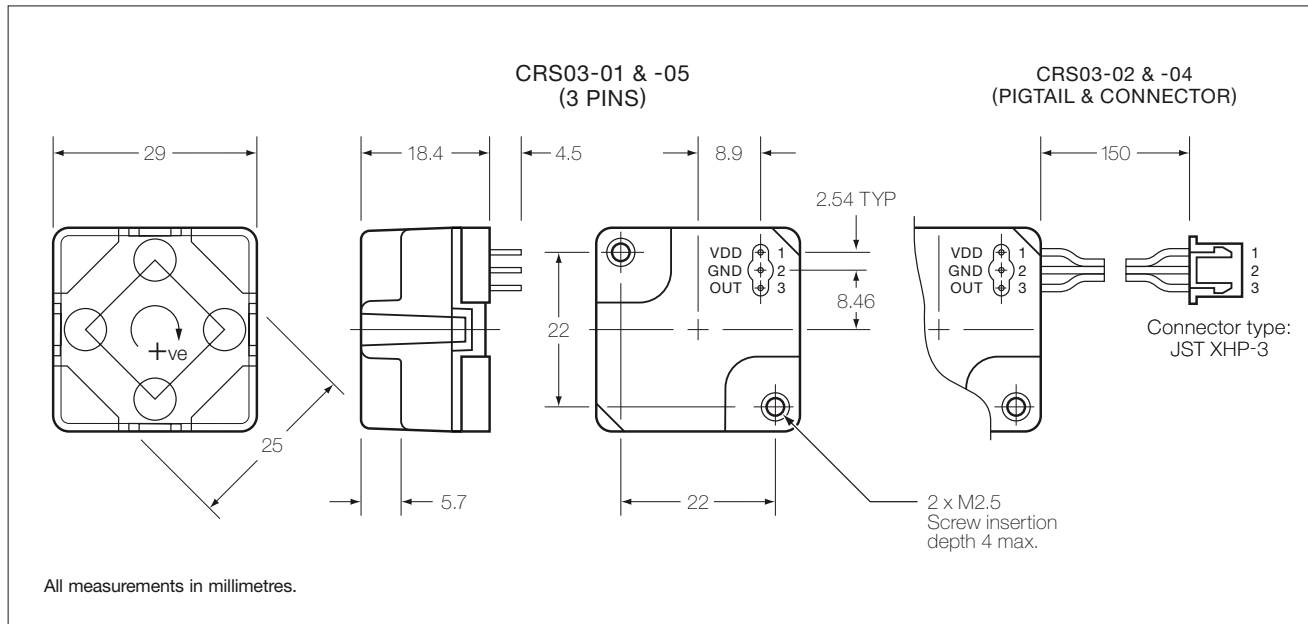

Typical Data

	-01S & -02S	-04S	-05S
Angular Rate Range	±100°/s	±200°/s	±80°/s
Output	Analogue voltage (ratiometric)		
Scale Factor			
Nominal	20mV/°/s	10mV/°/s	25mV/°/s
Variation over temperature range	< ±3%		
Nonlinearity	< ±0.5% of full scale		
Bias			
Setting tolerance	< ±3°/s	< ±6°/s	< ±4°/s
Variation over temperature range	< ±3°/s	< ±6°/s	< ±4°/s
Ratiometric error	< ±1°/s	< ±2°/s	< ±0.8°/s
Drift vs. time	< ±0.55°/s in any 30s period (after start-up time)		
g sensitivity	< ±0.1°/s/g on any axis		
Bandwidth	10Hz (-3dB)		
Quiescent Noise	< 1mV rms (3Hz to 10Hz)		
Environment			
Temperature	-40°C to +85°C		
Linear acceleration	< 100g		
Shock	200g (1ms, ½ sine)		
Vibration	2g rms (20Hz to 2kHz, random)		
Cross-axis sensitivity	< 5%		
Mass	< 18 gram		
Electrical			
Supply voltage	+4.75V to +5.25V		
Supply current	< 35mA (steady state)		
Noise and ripple	< 15mV rms (DC to 100Hz)		
Start-up time	< 0.2s		
RoHS Compliant	Yes (R & S suffix)		

Pin Connections

1	+5V
2	0V
3	Rate Output

Specification subject to change without notice.

© Copyright 2009
Silicon Sensing Systems Limited
All rights reserved.
Printed in England 02/09

Silicon Sensing Systems Limited Registered in England & Wales No. 3635234 Clittaford Road, Southway, Plymouth, Devon PL6 6DE
The device mark Silicon Sensing is a registered trade mark of Silicon Sensing Systems Community Trade Mark 003587664

CRS03-00-0100-131 Rev 2
DCR No. 616971



ALTHEN GmbH Mess- und Sensortechnik

Frankfurter Strasse 150 - 152
65779 Kelkheim / Germany

phone: +49 (0)6195 70060
fax: +49 (0)6195 70066

sales@althensensors.com
www.althensensors.com